



Enduring Resources

475 17th Street Suite 1500 Denver Colorado 80202
Telephone 303 573-1222 Fax 303 573 0461

December 23, 2005

Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
P. O. Box 145801
Salt Lake City, Utah 84114-5801

Attn.: Ms. Diana Whitney

**RE: Rainbow #11-24-32-20
SWNE Sec 20 T11S-R24E
Uintah County, Utah**

Dear Ms. Whitney:

Enclosed is an original application to drill concerning the above-referenced proposed well. This information was also submitted to the Bureau of Land Management.

Enduring Resources, LLC is requesting the Utah Division of Oil, Gas and Mining to hold this application and all future information as confidential.

If any questions arise or additional information is required, please contact me at 303-350-5114.

Very truly yours,

ENDURING RESOURCES, LLC

Alvin R. (Al) Arlian
Landman-Regulatory Specialist

ara
Enclosures:

RECEIVED
DEC 29 2005
DIV. OF OIL, GAS & MINING



Enduring Resources

475 17th Street Suite 1500 Denver Colorado 80202
Telephone 303 573-1222 Fax 303 573 0461

December 23, 2005

Bureau of Land Management
Vernal Field Office
170 South 500 East
Vernal, Utah 84078

Attention: Melissa Hawk

**RE: Rainbow #11-24-32-20
SWNE Sec 20 T11S-R24E
Uintah County, Utah**

Dear Ms. Hawk:

Enclosed are three original applications to drill concerning the above-referenced proposed well. This information was also submitted to the State of Utah, Division of Oil, Gas and Mining.

Enduring Resources, LLC is requesting the BLM to hold this application and all future information as confidential, when applicable.

If any questions arise or additional information is required, please contact me at 303-350-5114.

Very truly yours,

ENDURING RESOURCES, LLC

Alvin R. (Al) Arlian
Landman - Regulatory Specialist

ara/
Enclosures:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐
(highlight changes)

APPLICATION FOR PERMIT TO DRILL				5. MINERAL LEASE NO: UTU-73903	6. SURFACE: Federal
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>				8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: Enduring Resources, LLC				9. WELL NAME and NUMBER: Rainbow 11-24-32-20	
3. ADDRESS OF OPERATOR: 475 17th St., Ste 1500 CITY Denver STATE CO ZIP 80220			PHONE NUMBER: (303) 350-5114	10. FIELD AND POOL, OR WILDCAT: Undesignated	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 1802' FNL - 2153' FEL SWNE 649518X 39.849806 AT PROPOSED PRODUCING ZONE: Same 4412339Y 109.252295				11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE 20 11S 24E S	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 37.7 miles southwest of Bonanza, UT				12. COUNTY: Uintah	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 1802'		16. NUMBER OF ACRES IN LEASE: 1341		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40 acres	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) n/a none		19. PROPOSED DEPTH: 6,285		20. BOND DESCRIPTION: RLB0008031	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5815' RT-KB		22. APPROXIMATE DATE WORK WILL START: 2/20/2006		23. ESTIMATED DURATION: 20 days	

24. PROPOSED CASING AND CEMENTING PROGRAM							
SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
20"	14" line pipe			40	3 yards Ready Mix		
11"	8-5/8"	J-55	24#	2,000	Premium Lead	138 sxs	3.50 11.1
					Premium Tail	138 sxs	1.15 15.8
7-7/8"	4-1/2"	N-80	11.6#	62	Class G	52 sxs	3.3 11.0
					50/50 Poz Class G	729 sxs	1.56 14.3

25. ATTACHMENTS		CONFIDENTIAL
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:		
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER	

NAME (PLEASE PRINT) <u>Alvin R. (AI) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE	DATE <u>12/23/2005</u>

(This space for State use only)

API NUMBER ASSIGNED: 43-047-37577

(11/2001)

**Federal Approval of this
Action is Necessary**

**Approved by the
Utah Division of
Oil, Gas and Mining**

APPROVAL
Date: 12-29-05
By:

(See Instructions on Reverse Side)

RECEIVED
DEC 29 2005
DIV. OF OIL, GAS & MINING

T11S, R24E, S.L.B.&M.

ENDURING RESOURCES

Found: Set Marked
Stone, Pile of
Stones

N89°59'W - 79.96 (G.L.O.) 2635.22' (Measured)
N89°56'24"E (Basis of Bearings)

Found Set
marked stone,
pile of stones.

S89°55'46"W 2640.93' (Meas)

Found: Set Stone,
Pile of Stones

90°04'
(G.L.O.)

N00°02'19"W - (Basis of Bearings)
2638.54' (Measured)

1802'

Proposed
Well

2153'
(Computed)

Found: Set Stone,
Bearing Trees

20

200'
DRILLING
WINDOW

N00°03'W (G.L.O.)

**WELL LOCATION:
RAINBOW 11-24-32-20**

ELEV. UNGRADED GROUND = 5803.8'

N00°03'19"W 2648.32' (Meas)

Found: Set Marked
Stone, Pile of
Stones

Found: Set Marked
Stone, Pile of
Stones

N89°57'44"E 2636.12' (Meas)

S89°59'W - 79.90 (G.L.O.)

WELL LOCATION, RAINBOW 11-24-32-20,
LOCATED AS SHOWN IN THE SW 1/4 NE
1/4 OF SECTION 20, T11S, R24E,
S.L.B.&M. UINTAH COUNTY, UTAH.

NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. Proposed Well Bears S15°05'28"E 1865.56' From the North 1/4 Corner of Section 20.

DISTANCE TO NEAREST WELL

FROM WELL	TO WELL	COURSE	DISTANCE
11-24-32-20	11-24-31-20	N8°01'08"E	964'

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST OF
MY KNOWLEDGE AND BELIEF.

REL 152251
KOLBY R.
KAY

REGISTERED LAND SURVEYOR
REGISTRATION No. 152251
STATE OF UTAH

TIMBERLINE LAND SURVEYING, INC.

38 WEST 100 NORTH. - VERNAL, UTAH 84078
(435) 789-1365

DATE SURVEYED:
10-14-05

SURVEYED BY: K.R.K.

DATE DRAWN:
10-24-05

DRAWN BY: M.W.W.

SCALE: 1" = 1000'

Date Last Revised:

SHEET
2
OF 10

▲ = SECTION CORNERS LOCATED

BASIS OF ELEVATION IS BENCH MARK 89 EAM 1965
LOCATED IN THE WEST 1/2 OF SECTION 5, T12S,
R24E, S.L.B.&M. THE ELEVATION OF THIS BENCH
MARK IS SHOWN ON THE ARCHY BENCH SE 7.5 MIN.
QUADRANGLE AS BEING 6075'.

RAINBOW 11-24-32-20

(Proposed Well Head)

NAD 83 Autonomous

LATITUDE = 39° 50' 59.2"

LONGITUDE = 109° 15' 10.6"

SELF-CERTIFICATION STATEMENT

The following self-certification statement is provided per federal requirements dated June 15, 1988.

Please be advised that Enduring Resources, LLC is considered to be the operator of the following well.

Rainbow 11-24-32-20
1802' FNL - 2153' FEL SWNE
Section 20 T11S-R24E S.L.B.& M.
Lease Serial No.: UTU-73903
Uintah County, Utah

Enduring Resources, LLC is responsible under the terms and conditions of the lease for the operations conducted upon leased lands. Bond coverage is provided by UTB000173.



Alvin R. Arlian
Regulatory Specialist
Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, CO 80202
(303) 350-5114

December 23, 2005

Enduring Resources, LLC

Rainbow #11-24-32-20
SWNE Sec. 20 T11S-R24E
Uintah County, Utah
Lease # UTU-073903

ONSHORE ORDER 1 - DRILLING PLAN

1. Estimated Tops of Geological Markers:

Formation	Depth (K.B.)
Uinta	Surface
Green River	461'
Wasatch	2693'
Mesaverde	4086'

2. Estimated Depths of Anticipated Water, Oil, Gas or Other Minerals:

Substance	Formation	Depth (K.B.)
	KB-Uinta Elevation: 5815'	
Oil / Gas	Green River	461'
Oil /Gas	Wasatch	2693'
Oil /Gas	Mesaverde	4086'
	TD	6285'

A 11" hole will be drilled to approximately 2000 feet. The depth will be determined by the depth that the Birds Nest zone is encountered. The hole will be drilled 400 feet beyond the top of the Birds Nest zone and surface casing will be set.

3. Pressure Control Equipment: (3000 psi schematic attached)

- A. Type: Eleven (11) inch double gate hydraulic BOP with eleven (11) inch annular preventer on 3,000 psi casinghead, with 3,000 psi choke manifold equipped per the attached diagram. BOPE as specified in *Onshore Oil & Gas Order Number 2*. A PVT, stroke counter and flow sensor will be installed to check for flow and monitor pit volume.
- B. Pressure Rating: 3,000 psi BOPE
- C. Kelly will be equipped with upper and lower Kelly valves.
- D. Testing Procedure: Annular Preventer

At a minimum, the annular preventer will be pressure tested to 50% of the stack rated working pressure for a period of ten (10) minutes or until provisions of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the annular preventer is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the annular preventer will be functionally operated at least weekly.

Blow-Out Preventer

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the pipe and blind rams will be activated each trip, but not more than once each day. All BOP drills and tests will be recorded in the IADC driller's log.

E. Miscellaneous Information:

The blowout preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of *Onshore Oil & Gas Order Number 2*.

4. Proposed Casing & Cementing Program:

A. Casing Program: All New

Hole Size	Casing Size	Wt./Ft.	Grade	Joint	Depth Set (MD)
20"	14" O.D.				40' (GL)
11"	8-5/8"	24#	J-55	ST&C	0 – 2016' (KB) est.
7-7/8"	4-1/2"	11.6#	N-80	LT&C	0 – 6285' (KB)

The surface casing will have guide shoe, 1 joint, insert float collar. Centralize the shoe joint with bowspring centralizers in the middle and top of the joint and the next 16 joints with bowspring centralizers on every other collar (8 centralizers total). Thread lock guide shoe.

Casing string(s) will be pressure tested to 0.22 psi/foot of casing string length or 1500 psi, whichever is greater (not to exceed 70% of the internal yield strength of the casing), after cementing and prior to drilling out from under the casing shoe.

B. Casing Design Parameters:

Depth (MD)	Casing	Collapse(psi)/SF	Burst (psi)/SF	Tension(mlbs)/SF
40' (GL)	14" OD			
2016' (KB)	8-5/8", 24#/ft, J55, STC	1370/1.52(a)	2950/3.28(b)	244/5.81(c)
6285' (KB)	4-1/2", 11.6#/ft, N-80, LTC	6350/1.94 (d)	7780/2.59 (e)	223/3.56 (f)

- (a.) based on full evacuation of pipe with 8.6 ppg fluid on annulus
- (b.) based on 8.6 ppg gradient with no fluid on annulus
- (c.) based on casing string weight in 8.6 ppg mud
- (d.) based on full evacuation of pipe with 10.0 ppg fluid on annulus
- (e.) based on 9.2 ppg gradient, gas to surface, with no fluid on annulus, no gas gradient
- (f.) based on casing string weight in 9.2 ppg mud

PROPOSED CEMENTING PROGRAM

Surface Casing (if well will circulate)-Cemented to surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	1516	Premium cement + 16% gel + 0.25 pps celloflake	138	25%	11.1	3.50
8-5/8"	Tail	500	Premium cement + 2% CaCl ₂ + 0.25 pps celloflake	138	25%	15.8	1.15

A cement top job is required if cement fallback is greater than 10' below ground level. Top job (weight 15.8 ppg, yield 1.15 ft³/sx) cement will be premium cement w/ 3% CaCl₂ + 0.25 pps celloflake. Volume as required

Surface Casing (if well will not circulate) - Cemented to surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	500	Premium cement + 2% CaCl ₂ + 0.25 pps celloflake	138	25	15.8	1.15
8-5/8"	Top job	As req.	Premium cement + 3% CaCl ₂ + 0.25 pps celloflake	As Req.		15.8	1.15

Production Casing and Liner - Cemented TD to 300' above base of surface casing

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
4-1/2"	Lead	577	Class "G" + 5% NaCl + 12% Gel + 0.25 pps celloflake + 0.2% antifoam + 0.25% fluid loss + 1% extender	52	25	11.0	3.3
4-1/2"	Tail	3992	50/50 POZ Class G + 2% gel + 1% CaCl ₂ + 0.2% dispersant + 0.2% fluid loss + 0.1% antifoam	729	25	14.3	1.56

Cement volumes for the 4-1/2" Production Casing will be calculated to provide a top of cement to 300' above base of surface casing. Cement volumes are approximate and were calculated under the assumption that a gauge hole will be achieved. Actual cement volumes may vary due to variations in the actual hole size and will be determined by running a caliper log on the drilled hole. Actual cement types may vary due to hole conditions and cement contractor used.

All waiting on cement (WOC) times will be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. **Drilling Fluids (mud) Program:**

Interval (MD)	Mud Weight	Fluid Loss	Viscosity	Mud Type
0' – 2016' (KB)		No cntrl		Air/mist
2000'-3000' (KB)	8.4-8.6	No cntrl	28-36	Water
3000'-6285' (KB)	8.8-9.8	8 - 10 ml	32-42	Water/Gel

Sufficient mud material(s) to maintain mud properties, control lost circulation and contain a blowout will be available at the well site during drilling operations.

6. **Evaluation Program:**

Tests: No tests are currently planned.

Coring: No cores are currently planned.

Samples: No sampling is currently planned.

Logging

- Dual Induction – SFL /Gamma Ray/Caliper/SP/TDLT/CNL/ML
TD to Base Surface Casing
- Cement Bond Log / Gamma Ray:
TD to Base of Surface Casing or Top of Cement if below Base of Surface Casing

Stimulation: A stimulation or frac treatment will be designed for completion of this well based on openhole log analysis. The drill site, as approved, will be sufficient size to accommodate all completion activities.

7. **Abnormal Conditions:**

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered or known to exist from previous wells drilled to similar depths in the general area.

Maximum anticipated bottom hole pressure equals approximately 3,268 psi (calculated at 0.52psi/foot of hole) and maximum anticipated surface pressure equals approximately 1,886 psi (anticipated bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot of hole).

8. **Anticipated Starting Dates:**

- Anticipated Commencement Date- Within one year of APD issue.
- Drilling Days- Approximately 10 days
- Completion Days - Approximately 10 days
- Anticipate location construction within 30 days of permit issue.

9. **Variances:**

None anticipated

10. **Other:**

A Cultural Resource Inventory and Paleontology reconnaissance shall be conducted for the well location, access route and pipeline. The reports shall be submitted to the Division of Oil, Gas and Mining and the School and Institutional Trust lands Administration upon their receipt.

Single Shot directional surveys will be dropped every 2000 feet to monitor hole angle.

Enduring Resources, LLC

**Rainbow #11-24-32-20
SWNE Sec. 20 T11S-R24E
Uintah County, Utah
Lease # UTU-073903**

Directions to the Rainbow #11-24-32-20 Well Pad

FROM THE INTERSECTION OF U.S. HIGHWAY 40 AND 500 EAST STREET IN VERNAL, UTAH PROCEED IN AN EASTERLY THEN SOUTHERLY DIRECTION ALONG U.S. HIGHWAY 40 APPROXIMATELY 3.3 MILES TO THE JUNCTION OF STATE HIGHWAY 45; EXIT RIGHT AND PROCEED IN A SOUTHERLY DIRECTION ALONG STATE HIGHWAY 45 APPROXIMATELY 40.5 MILES TO THE JUNCTION OF THE DRAGON ROAD (COUNTY B ROAD 4180). THIS ROAD IS LOCATED APPROXIMATELY 4.8 MILES SOUTH OF BONANZA, UTAH. EXIT LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION ALONG COUNTY B ROAD 4180 APPROXIMATELY 4.0 MILES TO THE JUNCTION OF THE KINGS WELLS ROAD (COUNTY B ROAD 4190). EXIT RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION ALONG COUNTY B ROAD 4190 APPROXIMATELY 8.7 MILES TO THE JUNCTION OF THE ATCHEE RIDGE ROAD (COUNTY B ROAD 4270). CONTINUE ALONG COUNTY B ROAD 4190 IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 4.3 MILES TO THE JUNCTION OF THE LONG DRAW ROAD (COUNTY B ROAD 4260). CONTINUE ALONG COUNTY B ROAD 4190 IN A SOUTHERLY, THEN WESTERLY DIRECTION APPROXIMATELY 2.3 MILES TO THE JUNCTION OF A COUNTY D ROAD. EXIT RIGHT AND PROCEED IN A NORTHERLY DIRECTION ALONG THE COUNTY D ROAD APPROXIMATELY 3.4 MILES TO THE PROPOSED ACCESS ROAD. FOLLOW ROAD FLAGS IN A EASTERLY DIRECTION APPROXIMATELY 2,430 FEET TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 39.3 MILES IN A SOUTHWESTERLY DIRECTION.

Enduring Resources, LLC

**Rainbow #11-24-32-20
SWNE Sec. 20 T11S-R24E
Uintah County, Utah
Lease # UTU-073903**

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Directions to the Rainbow #11-24-32-20 Well Pad

FROM THE INTERSECTION OF U.S. HIGHWAY 40 AND 500 EAST STREET IN VERNAL, UTAH PROCEED IN AN EASTERLY THEN SOUTHERLY DIRECTION ALONG U.S. HIGHWAY 40 APPROXIMATELY 3.3 MILES TO THE JUNCTION OF STATE HIGHWAY 45; EXIT RIGHT AND PROCEED IN A SOUTHERLY DIRECTION ALONG STATE HIGHWAY 45 APPROXIMATELY 40.5 MILES TO THE JUNCTION OF THE DRAGON ROAD (COUNTY B ROAD 4180). THIS ROAD IS LOCATED APPROXIMATELY 4.8 MILES SOUTH OF BONANZA, UTAH. EXIT LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION ALONG COUNTY B ROAD 4180 APPROXIMATELY 4.0 MILES TO THE JUNCTION OF THE KINGS WELLS ROAD (COUNTY B ROAD 4190). EXIT RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION ALONG COUNTY B ROAD 4190 APPROXIMATELY 8.7 MILES TO THE JUNCTION OF THE ATCHEE RIDGE ROAD (COUNTY B ROAD 4270). CONTINUE ALONG COUNTY B ROAD 4190 IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 4.3 MILES TO THE JUNCTION OF THE LONG DRAW ROAD (COUNTY B ROAD 4260). CONTINUE ALONG COUNTY B ROAD 4190 IN A SOUTHERLY, THEN WESTERLY DIRECTION APPROXIMATELY 2.3 MILES TO THE JUNCTION OF A COUNTY D ROAD. EXIT RIGHT AND PROCEED IN A NORTHERLY DIRECTION ALONG THE COUNTY D ROAD APPROXIMATELY 3.4 MILES TO THE PROPOSED ACCESS ROAD. FOLLOW ROAD FLAGS IN A EASTERLY DIRECTION APPROXIMATELY 2,430 FEET TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 39.3 MILES IN A SOUTHWESTERLY DIRECTION.

2. Planned Access Roads:

The proposed access road will be approximately 1,160 feet of new construction (ON-LEASE) and 1,270 feet of new construction (OFF-LEASE) on American Gilsonite. The balance of the OFF-LEASE road is a Class D County Road. No new road will have to be built OFF-LEASE. However, the County Road Class D Road will be improved to meet BLM requirements. Please refer to Topo Map "B" for the takeoff point for the new road construction and the Class D County Road that will be improved.

The proposed access road will be utilized to transport personnel, equipment and supplies to and from the proposed well site during drilling, completion and production operations. The road will be utilized year round.

The access road will be crowned 2% to 3%, ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet right-of-way. Maximum grade of road is 5% or less. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. No fence crossings, culverts, turnouts, cattle guards or major cuts and fills are required. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. Location of Existing Wells within a One-Mile radius (See "Topo" Map "C" attached):

The following wells are wells located within a one (1) mile or greater radius of the proposed location.

- | | | |
|----|-------|--|
| a. | None: | Water Wells: |
| b. | None: | Injection Wells: |
| c. | None: | Producing Wells: |
| | | i. 43-047-31489 RAINBOW UNIT No. 6 SENW Sec 19 |
| | | ii. 43-047-36150 RAINBOW 14-17 SESW Sec 17 |
| d. | None: | Drilling Wells: |
| e. | None: | Shut-in Wells: |
| | | i. 43-047-32778 RAINBOW UNIT No. 7 NWNW Sec 18 |
| f. | None: | Temporarily Abandoned Wells: |

- g. None: Disposal Wells:
- h. None: Abandoned Wells:
 - i. 43-047-15808 RAINBOW UNIT 6 SENW Sec 19
- i. None: Dry Holes:
- j. None: Observation Wells:
- k. One: Pending (staked) Wells:
 - i. Various wells staked by Enduring in Secs. 17 and 20

4. **Location of Existing and/or Proposed Facilities:**

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e. production tanks, produced water tanks and/or heater treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank and be independent of the back cut.

All permanent (on site for six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the rocky Mountain Five State Inter-Agency Committee

All facilities will be painted within 6 months of installation. The color shall be Desert Tan. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Gas Gathering Pipeline:	ON-LEASE	440' BLM (*an additional 400' if this Well Is drilled first).
	OFF-LEASE	1,270' American Gilsonite (**this pipeline may already exist if a fee well is drilled first)

Enduring's agreement with American Gilsonite requires that any pipelines on their land shall be surface pipelines.

If the well is capable of economic production, a surface gas gathering line and related equipment shall be installed. The surface gas gathering line shall be in use year round. A total of approximately less than *440 feet of surface gas gathering pipeline shall be laid on the surface to minimize surface disturbance:

- a. ON-LEASE approximately *440 feet, and
- b. OFF-LEASE approximately **1,270 feet,

of 4 inch or less diameter steel, unpainted, welded gas gathering line is proposed.

The proposed pipeline will begin at the well site; and be laid on the surface next to the new access road (east/west), and tie-in directly to a proposed 6" surface pipeline next to the County Class D road (This is a surface pipeline from the 43-047-36150 RAINBOW 14-17 located in SESW Sec 17 run south to a tie-in point at the Rock Hopper NESW of Sec 29). The meter run will be housed. The gas gathering line will be buried or anchored down from the wellhead to the meter.

Upon plugging and abandonment, the gas gathering line will be removed and the disturbed area will be re-contoured and restored as near as practical to the original condition. If necessary, re-seeding operations will be performed after completion of other reclamation operations.

5. Location and Type of Water Supply:

Water will be obtained from the White River by Tu and Frum, Inc. Water User Claim #49-2185, Application #T75517, or by Target Trucking Water User Claim #43-2195, or by Dalbo Inc. Water User Claim #43-8496

Water will be hauled to the location over the roads marked on "Topo" Maps "A" and "B."

No water well is to be drilled on this lease.

6 Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized for location and access road construction.

Any gravel will be obtained from a commercial source; however, gravel sized rock debris associated with location and access road construction may be used as access road surfacing material.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break or allow discharge of liquids.

The reserve pit will be lined with ¼ felt and a minimum of 16 mm plastic with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the will be disposed of in the pit.

A chemical portable toilet will be furnished with the drilling rig. The toilet will be replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Vernal Wastewater Treatment Facility in accordance with state and county regulations.

Garbage, trash and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported or disposed of in association with the drilling, completion or testing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported or disposed of in association with the drilling, completion or testing of this well.

Produced oil will be stored in an oil tank and then hauled by truck to a crude purchaser facility. Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to an approved disposal site.

8. Ancillary Facilities:

During drilling operations, approximately 20 days, the site will be a manned camp. Three or four additional trailers will be on location to serve as the crews' housing and eating facilities. These will be located on the perimeter of the pad site within the topsoil stockpiles. Refer to Sheet 4.

9. Well Site Layout: (Refer to Sheets #2, #3, and #4)

The attached Location Layout Diagrams described drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s) and surface material stockpiles(s).

Please see the attached diagram for rig orientation and access roads.

The top soil will be windrowed rather than piled. It will be reseeded and track walker at the time the location is constructed. Seeding will be with the determined during the onsite. (Refer to "Seed Mixture for Windrowed Top Soil Will included:" following herein.

The top soil removed from the pit area will be store separately and will not be reseeded until the pit is reclaimed.

All pits shall be fence to the following minimum standards:

- a. 39 inch net wire shall be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.
- b. The net wire shall be no more than 2 inches above the ground. The barbed wire shall be 3 inches over the new wire. Total height of the fence shall be at least 42 inches.
- c. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
- d. Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two fence posts shall be no greater than 16 feet.
- e. All wire shall be stretched by, using a stretching device, before it is attached to corner posts.
- f. The reserve pit fencing will be on three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.
- g. Location size may change prior to drilling the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling, the location will be re-surveyed and a Form 9 will be submitted.

10. Plans for Surface Reclamation:

Producing Location:

- a. Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, materials, trash and debris not required for production.
- b. Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 40CFR 3162.7.
- c. Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.
- d. The reserve pit and that portion of the location not needed for production facilities/operations will be re-contoured to the approximated natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.
- e. To prevent surface water(s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface 3 feet above surrounding round surface to allow the reclaimed pit area to drain effectively.
- f. Upon completion of back filling, leveling and re-contouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

- i. Abandoned well sites, roads and other disturbed areas will be restored as nearly as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions and re-establishment of vegetation as specified.
- ii. All disturbed surfaces will be re-contoured to the approximated natural contours with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. If necessary, re-seeding operations will be performed after completion of other reclamation operations.

Seed Mixture for Windrowed Top Soil Will Included:

To be provided by the BLM (and, if applicable, subject to Enduring's agreement with American Gilsonite).

11. Surface Ownership: Location, Access and Pipeline Route:

Wellsite: Bureau of Land Management

Access: Bureau of Land Management and American Gilsonite

Pipeline: Bureau of Land management and American Gilsonite

12. Other Information**On-site Inspection for Location, Access and Pipeline Route:**

The on-site was conducted December 15, 2005.

Special Conditions of Approval:

- Tanks and Production Equipment shall be painted Dark Olive Black.
- Gathering Pipeline shall be 4" or less.

Archeology:

- a. A Cultural Resource Inventory Report is pending and to be prepared by Montgomery Archaeological Consultants.

Paleontology:

- a. A Paleontology Reconnaissance Report is pending and to be prepared by Intermountain Paleo-Consulting.

If, during operations, any archaeological or historical sites, or any objects of antiquity (subject to the Antiquities Act of June 8, 1906) are discovered, all operations which

would affect such sites will be suspended and the discovery reported promptly to the surface management agency.

13, Lessee's or Operator's Representatives:



Representatives:

Alvin R. (Al) Arlian
Landman – Regulatory Specialist
Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, Colorado 80202
Office Tel: 303-350-5114
Fax Tel: 303-573-0461
aarlian@enduringresources.com

Frank Hutto
Vice President – Operations
Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, Colorado 80202
Office Tel: 303-573-5102
Fax Tel: 303-573-0461
fhutto@enduringresources.com

3,000 PSI

BOF STACK

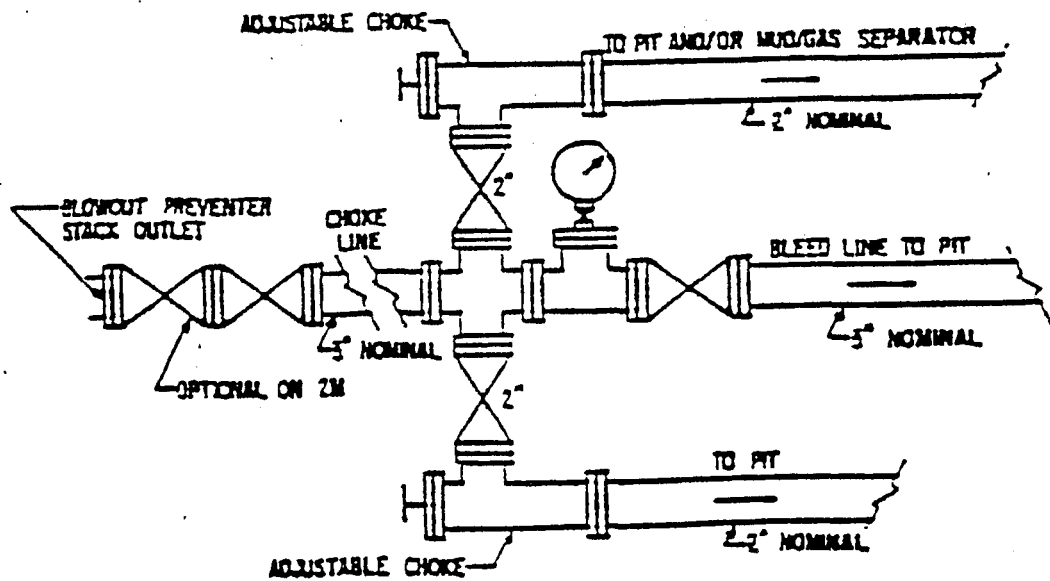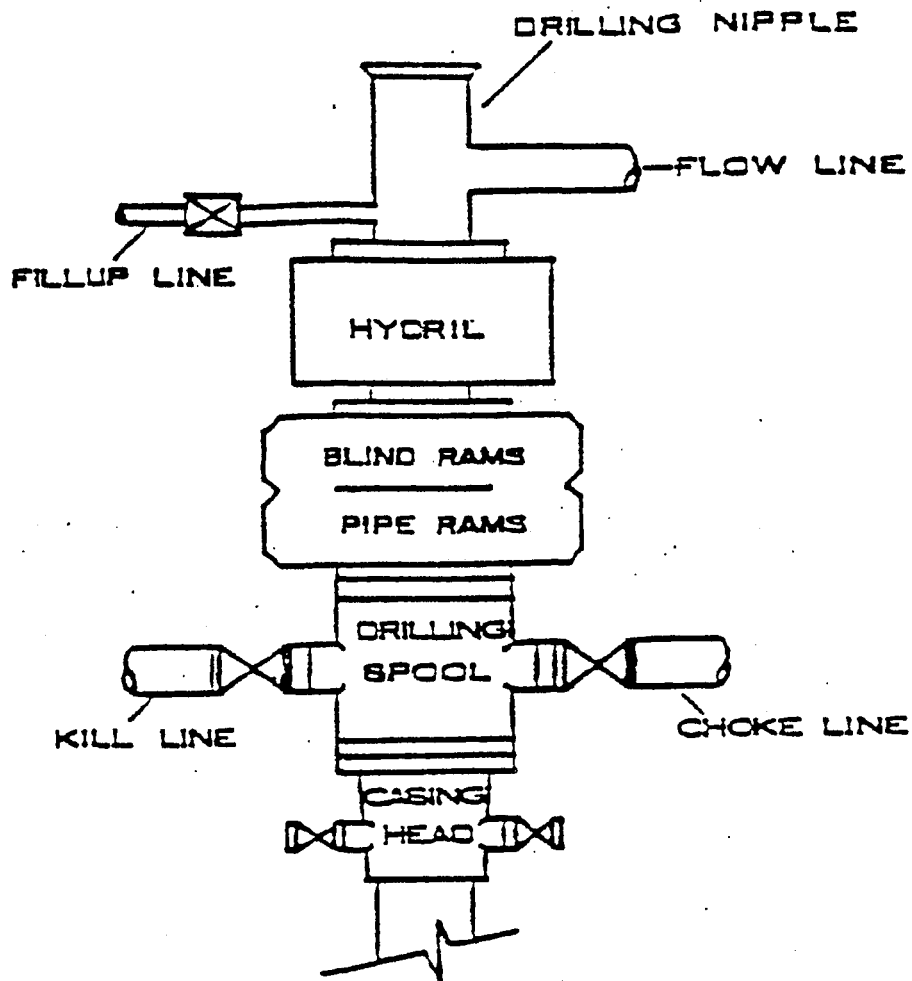

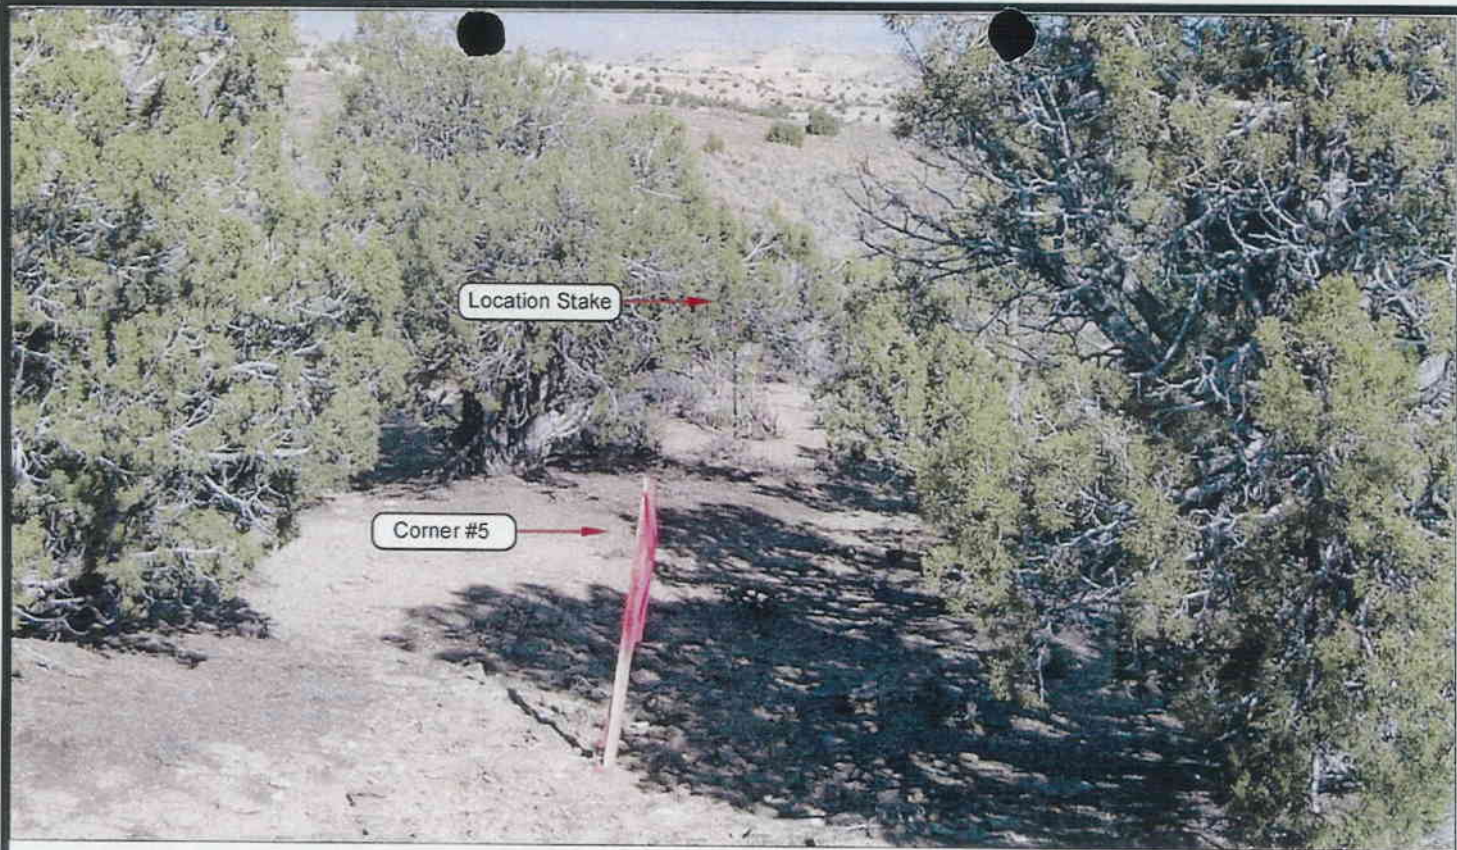


PHOTO VIEW: FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY



PHOTO VIEW: FROM BEGINNING OF PROPOSED ROAD

CAMERA ANGLE: NORTHEASTERLY

ENDURING RESOURCES

Rainbow 11-24-32-20
SECTION 20, T11S, R24E, S.L.B.&M.
1802' FNL & 2153' FEL

LOCATION PHOTOS

TAKEN BY: B.J.S.

DRAWN BY: B.J.Z.

DATE TAKEN: 10-14-05

DATE DRAWN: 11-11-05


REVISED:

Timberline Land Surveying, Inc.
 36 West 100 North Vernal, Utah 84078
 (435) 789-1365

SHEET
1
OF 10

ENDURING RESOURCE




CUT SHEET - RAINBOW 11-24-32-20

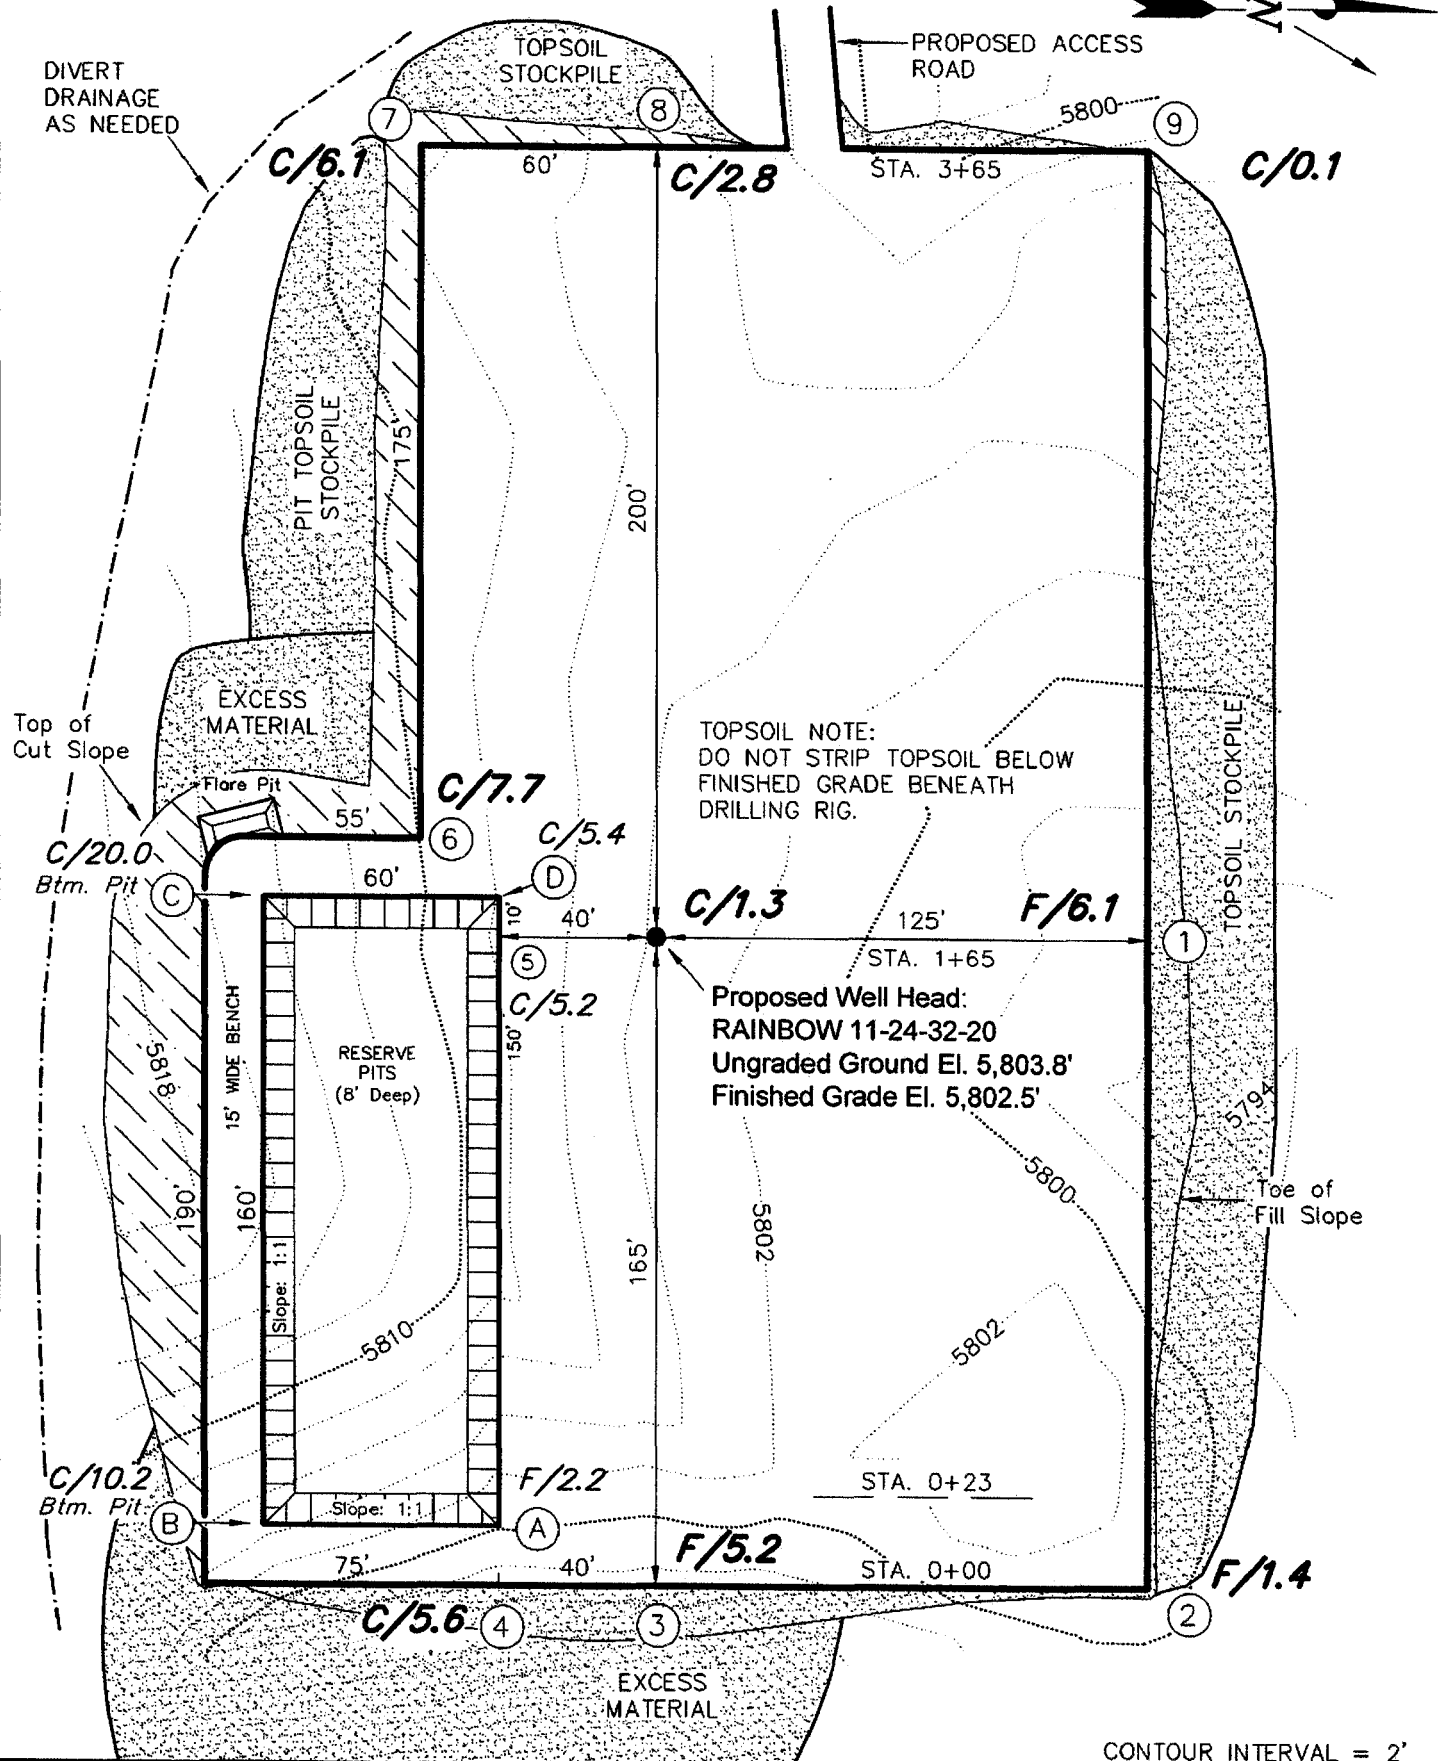


Section 20, T11S, R24E, S.L.B.&M.		Qtr/Qtr Location: SW NE	Footage Location: 1802' FNL & 2153' FEL
Date Surveyed: 10-14-05	Date Drawn: 10-24-05	Date Last Revision:	Timberline (435) 789-1365 Land Surveying, Inc. 38 WEST 100 NORTH VERNAL, UTAH 84078
Surveyed By: B.J.S.	Drawn By: M.W.W.	Scale: 1" = 50'	

ENDURING RESOURCES

CROSS SECTIONS - RAINBOW 11-24-32-20

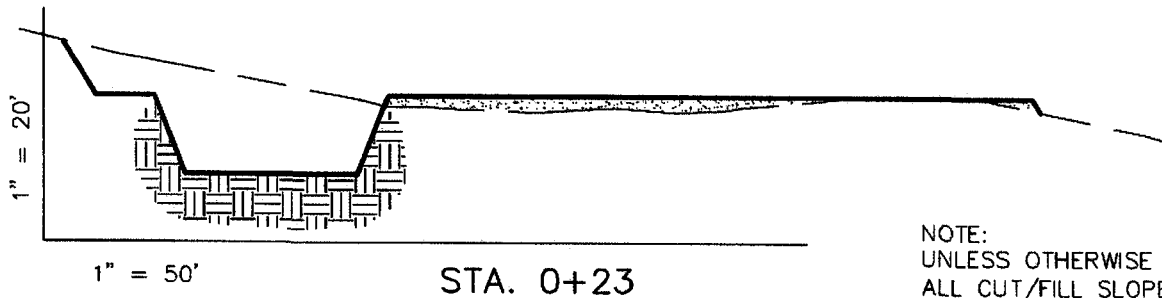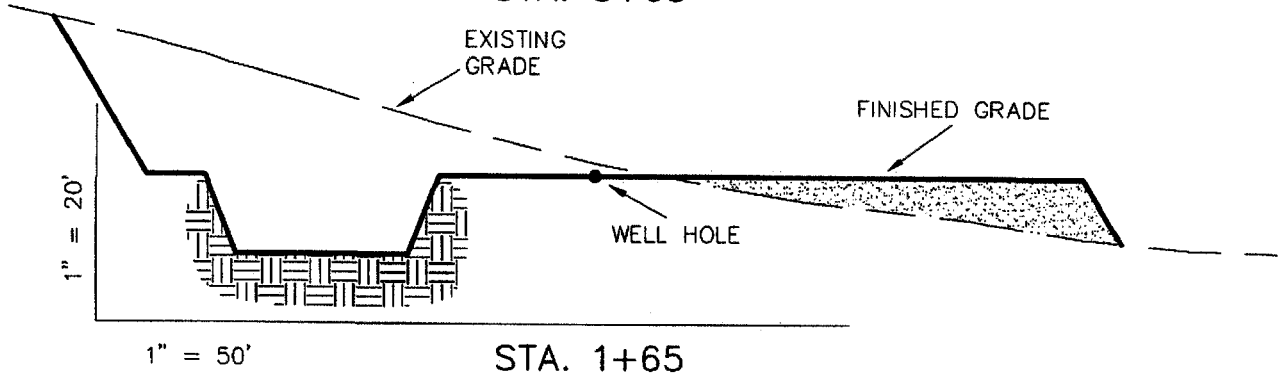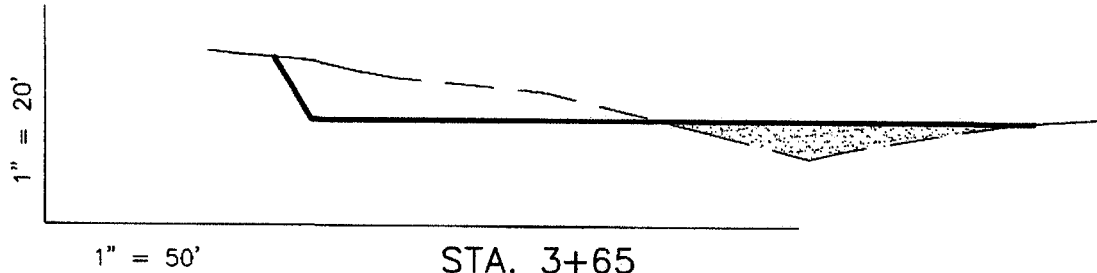

NOTE:
UNLESS OTHERWISE NOTED
ALL CUT/FILL SLOPES ARE
AT 1.5:1

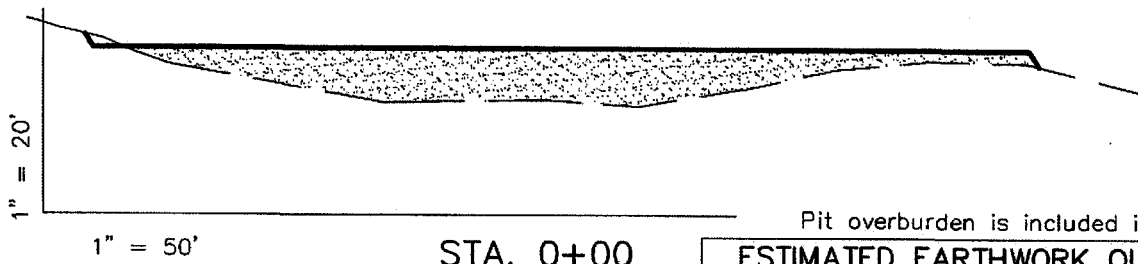

Pit overburden is included in pad cut.

REFERENCE POINTS

175' NORTHERLY=5,795.0'
225' NORTHERLY=5,794.5'
250' WESTERLY =5,805.2'
300' WESTERLY =5,803.3'

ESTIMATED EARTHWORK QUANTITIES (No shrink or swell adjustments have been used) (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	7,850	3,180	Topsoil is not included in Pad Cut	4,670
PIT	2,340	0		2,340
TOTALS	10,190	3,180	1,440	7,010

Excess Material after Pit Rehabilitation = 5,840 Cu. Yds.


Section 20, T11S, R24E, S.L.B.&M.		Qtr/Qtr Location: SW NE	Footage Location: 1802' FNL & 2153' FEL
Date Surveyed: 10-14-05	Date Drawn: 10-24-05	Date Last Revision:	
Surveyed By: B.J.S.	Drawn By: M.W.W.	Scale: 1" = 50'	

Timberline
Land Surveying, Inc.
38 WEST 100 NORTH VERNAL, UTAH 84078
(435) 789-1365

SHEET
4
OF 10

ENDURING RESOURCES


TYPICAL RIG LAYOUT - RAINBOW 11-24-32-20

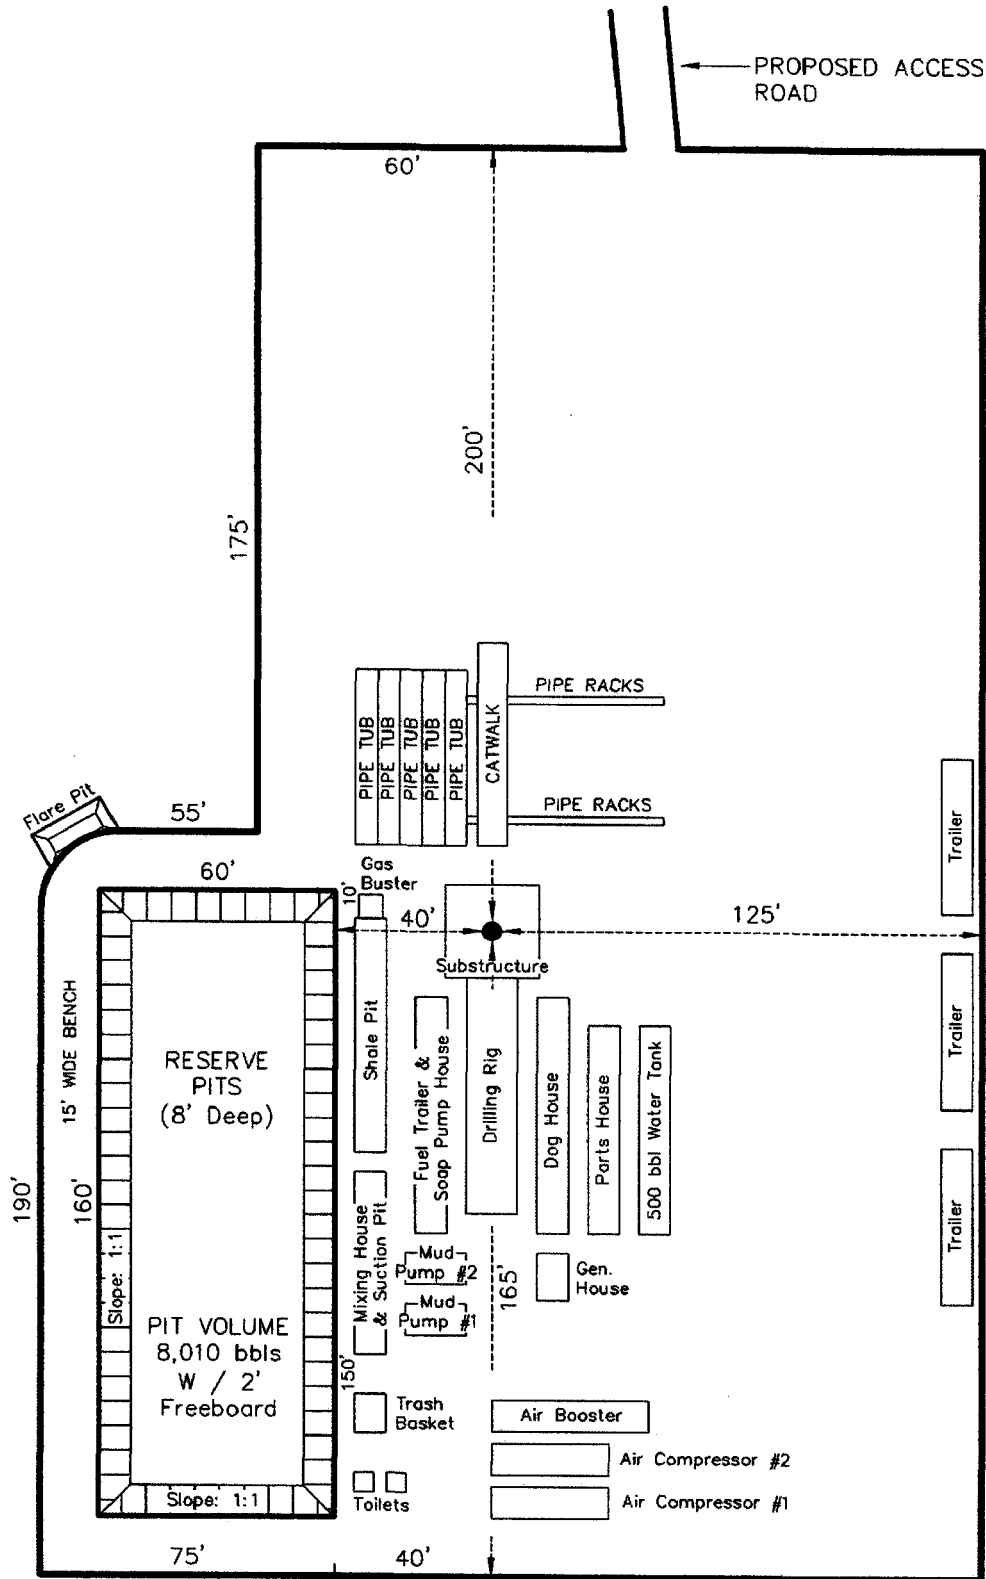


Section 20, T11S, R24E, S.L.B.&M.		Qtr/Qtr Location: SW NE	Footage Location: 1802' FNL & 2153' FEL
Date Surveyed: 10-14-05	Date Drawn: 10-24-05	Date Last Revision:	Timberline (435) 789-1365
Surveyed By: B.J.S.	Drawn By: M.W.W.	Scale: 1" = 50'	Land Surveying, Inc.
38 WEST 100 NORTH VERNAL, UTAH 84078			SHEET 5 OF 10

ENDURING RESOURCES

TYPICAL PRODUCTION LAYOUT - RAINBOW 11-24-32-20

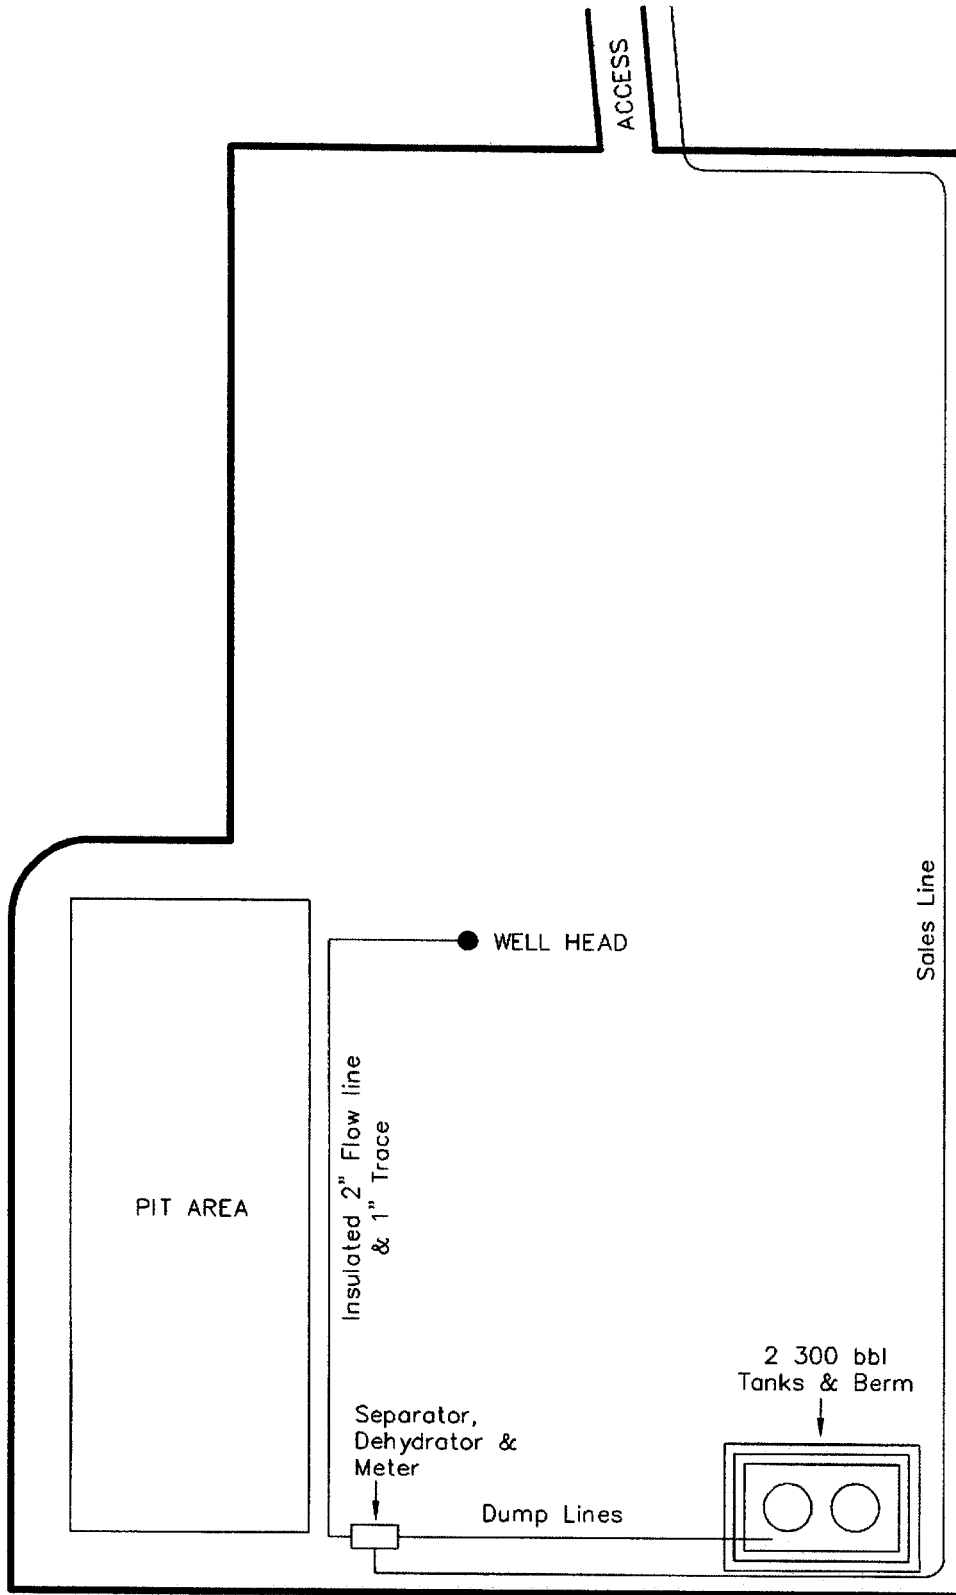

Section 20, T11S, R24E, S.L.B.&M.		Qtr/Qtr Location: SW NE	Footage Location: 1802' FNL & 2153' FEL
Date Surveyed: 10-14-05	Date Drawn: 10-24-05	Date Last Revision:	<i>Timberline</i> (435) 789-1365
Surveyed By: B.J.S.	Drawn By: M.W.W.	Scale: 1" = 50'	<i>Land Surveying, Inc.</i>
38 WEST 100 NORTH VERNAL, UTAH 84078			SHEET 6 OF 10

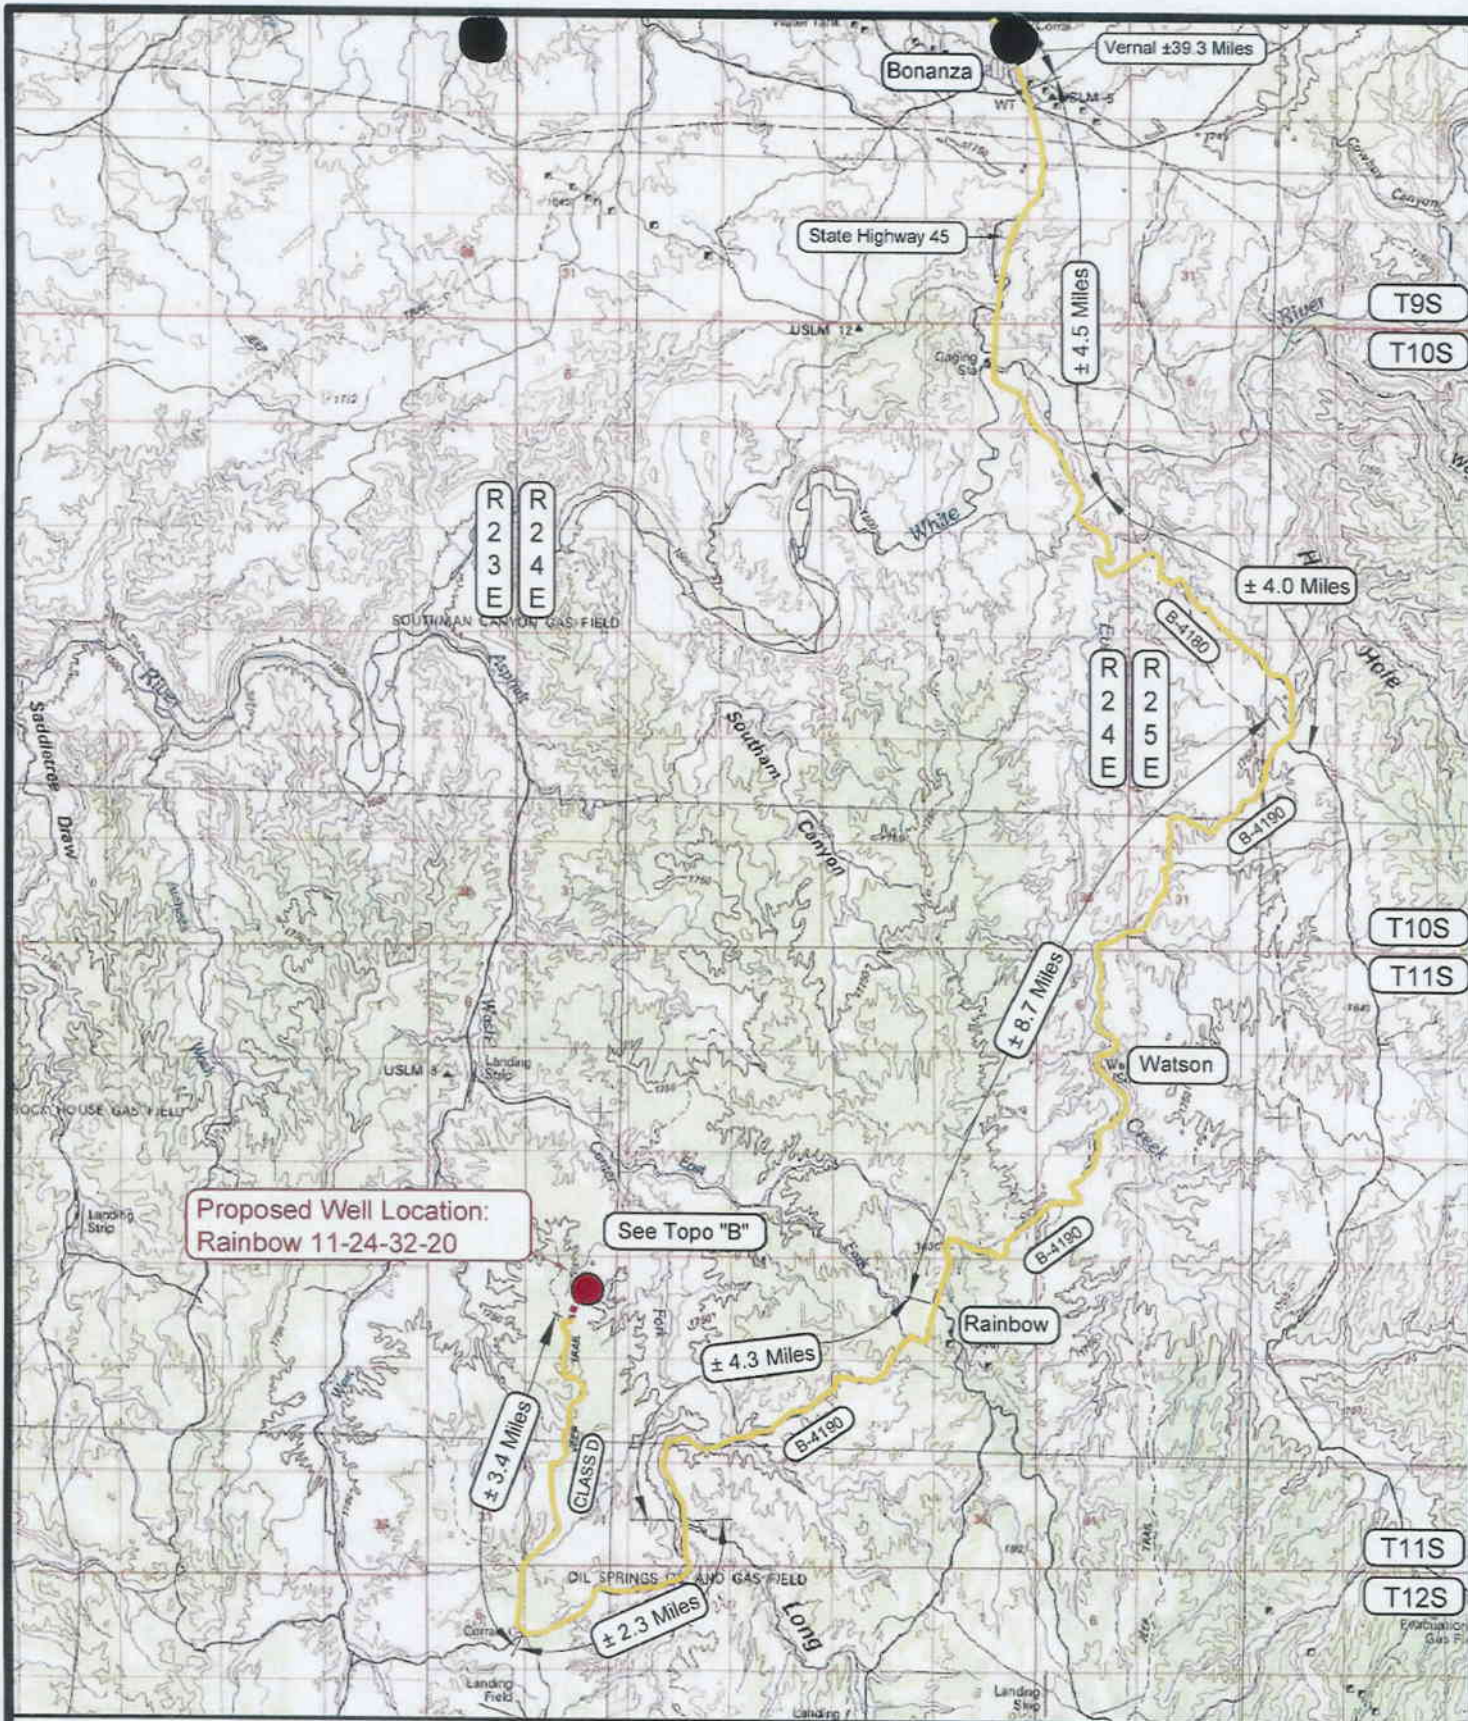

Proposed Well Location:
Rainbow 11-24-32-20

See Topo "B"

LEGEND

- = PROPOSED WELL LOCATION
- = EXISTING ROAD
- = EXISTING ROAD (TO BE IMPROVED)
- = PROPOSED ACCESS ROAD
- B-5460 = COUNTY ROAD CLASS & NUMBER

TOPOGRAPHIC MAP "A"

SCALE: 1:10,000'

DRAWN BY: B.J.Z.

DATE SURVEYED: 10-14-05

DATE DRAWN: 11-09-05


REVISED:

ENDURING RESOURCES

Rainbow 11-24-32-20
SECTION 20, T11S, R24E, S.L.B.&M.
1802' FNL & 2153' FEL

Timberline Land Surveying, Inc.
38 West 100 North Vernal, Utah 84078
(435) 789-1365

SHEET
7
OF 10

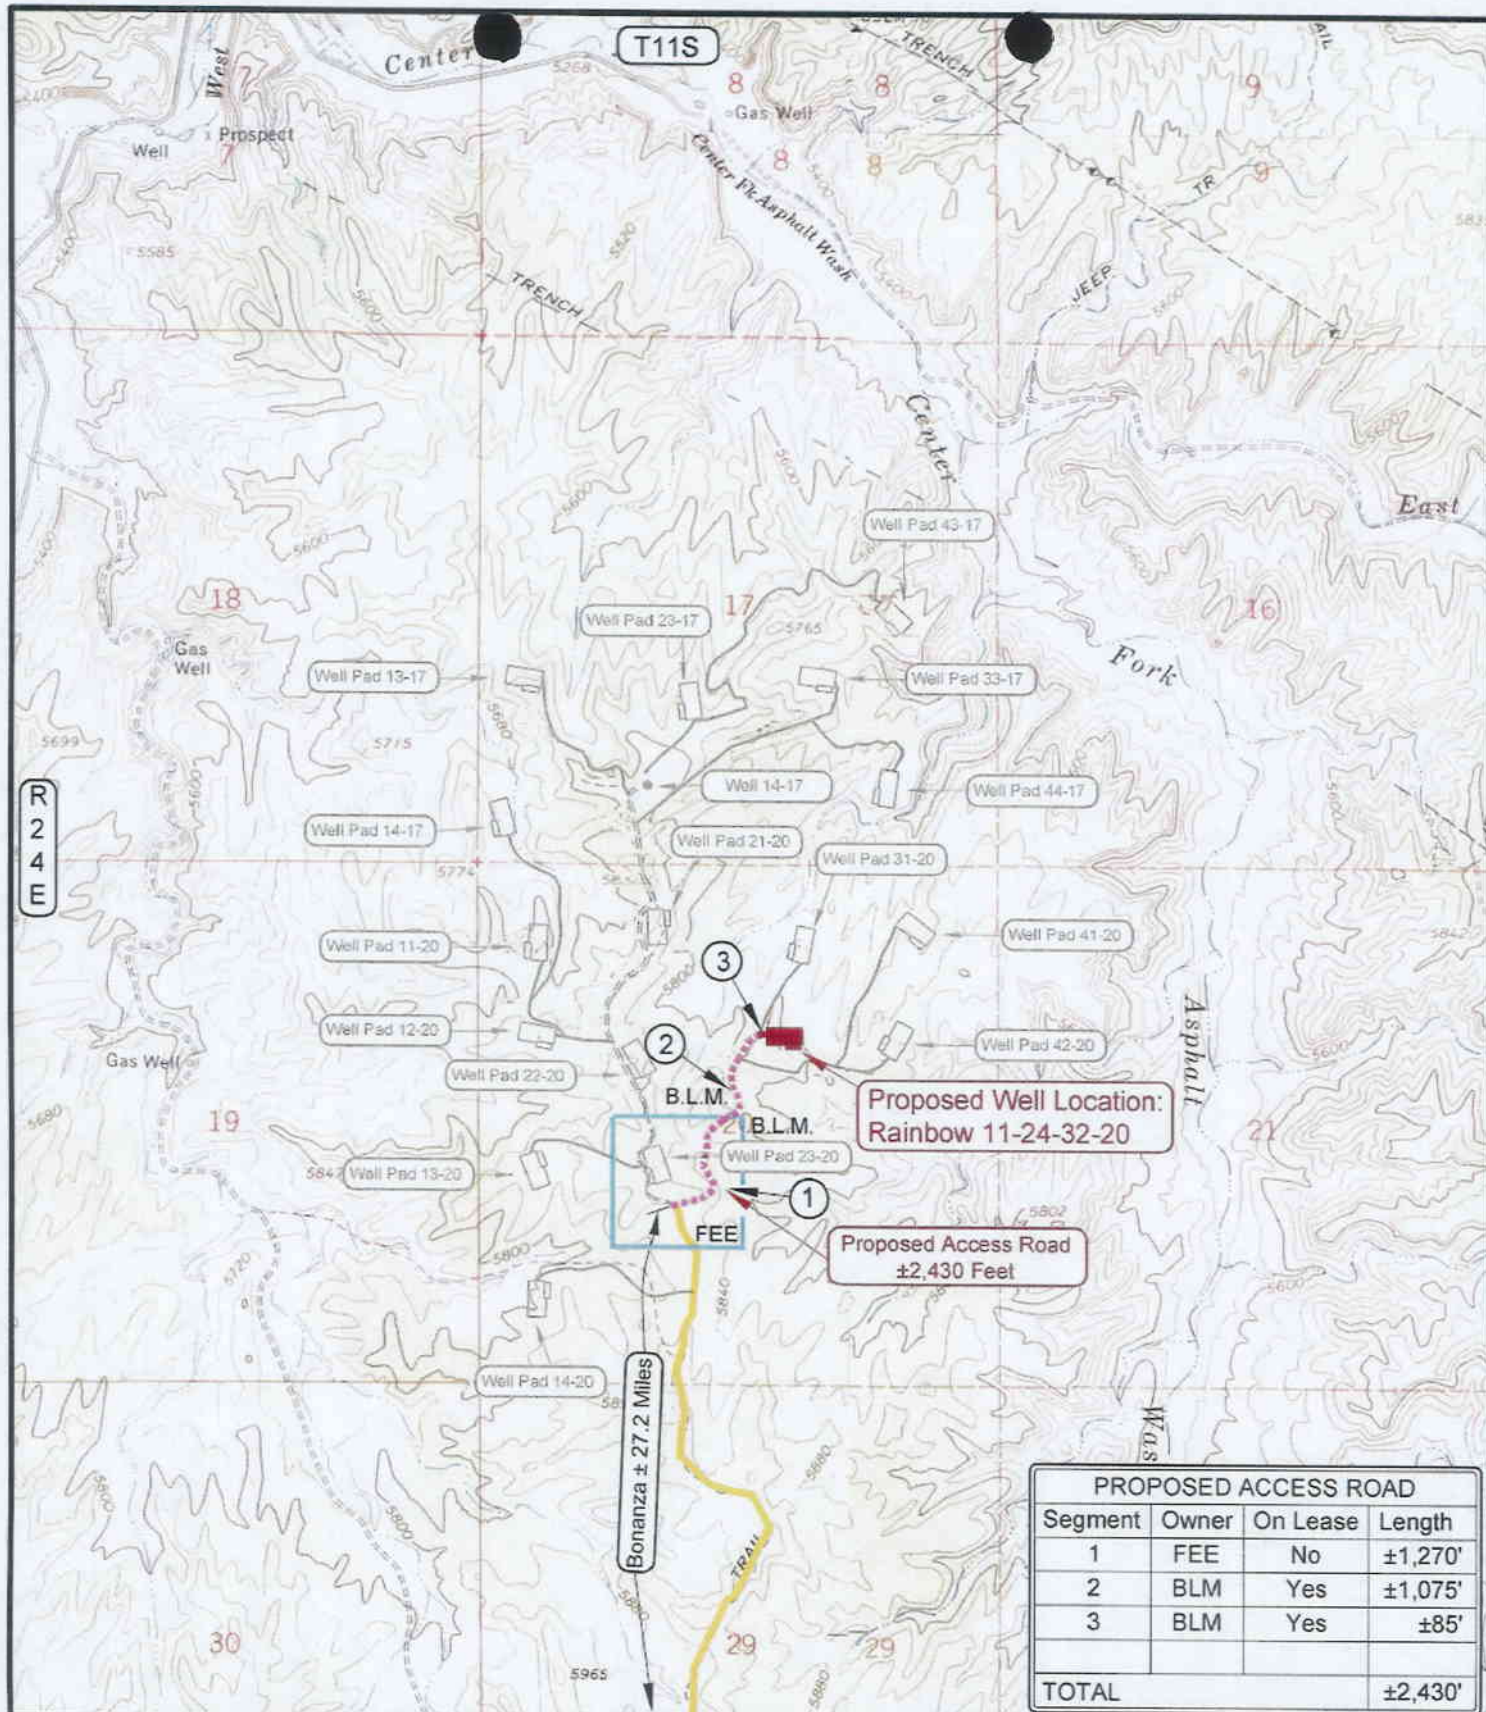

LEGEND

- PROPOSED ACCESS ROAD
- SUBJECT WELL
- SHARED ACCESS
- EXISTING ROAD
- EXISTING ROAD (TO BE IMPROVED)
- COUNTY ROAD CLASS & NUMBER
- LEASE LINE AND / OR PROPERTY LINE

TOPOGRAPHIC MAP "B"

SCALE: 1" = 2000'

DRAWN BY: BJ.Z.

DATE SURVEYED: 10-14-05

DATE DRAWN: 11-09-05


REVISED:

ENDURING RESOURCES

Rainbow 11-24-32-20
SECTION 20, T11S, R24E, S.L.B.&M.
1802' FNL & 1792' FEL

Timberline Land Surveying, Inc.
38 West 100 North Vernal, Utah 84078
(435) 789-1365

SHEET
8
OF 10

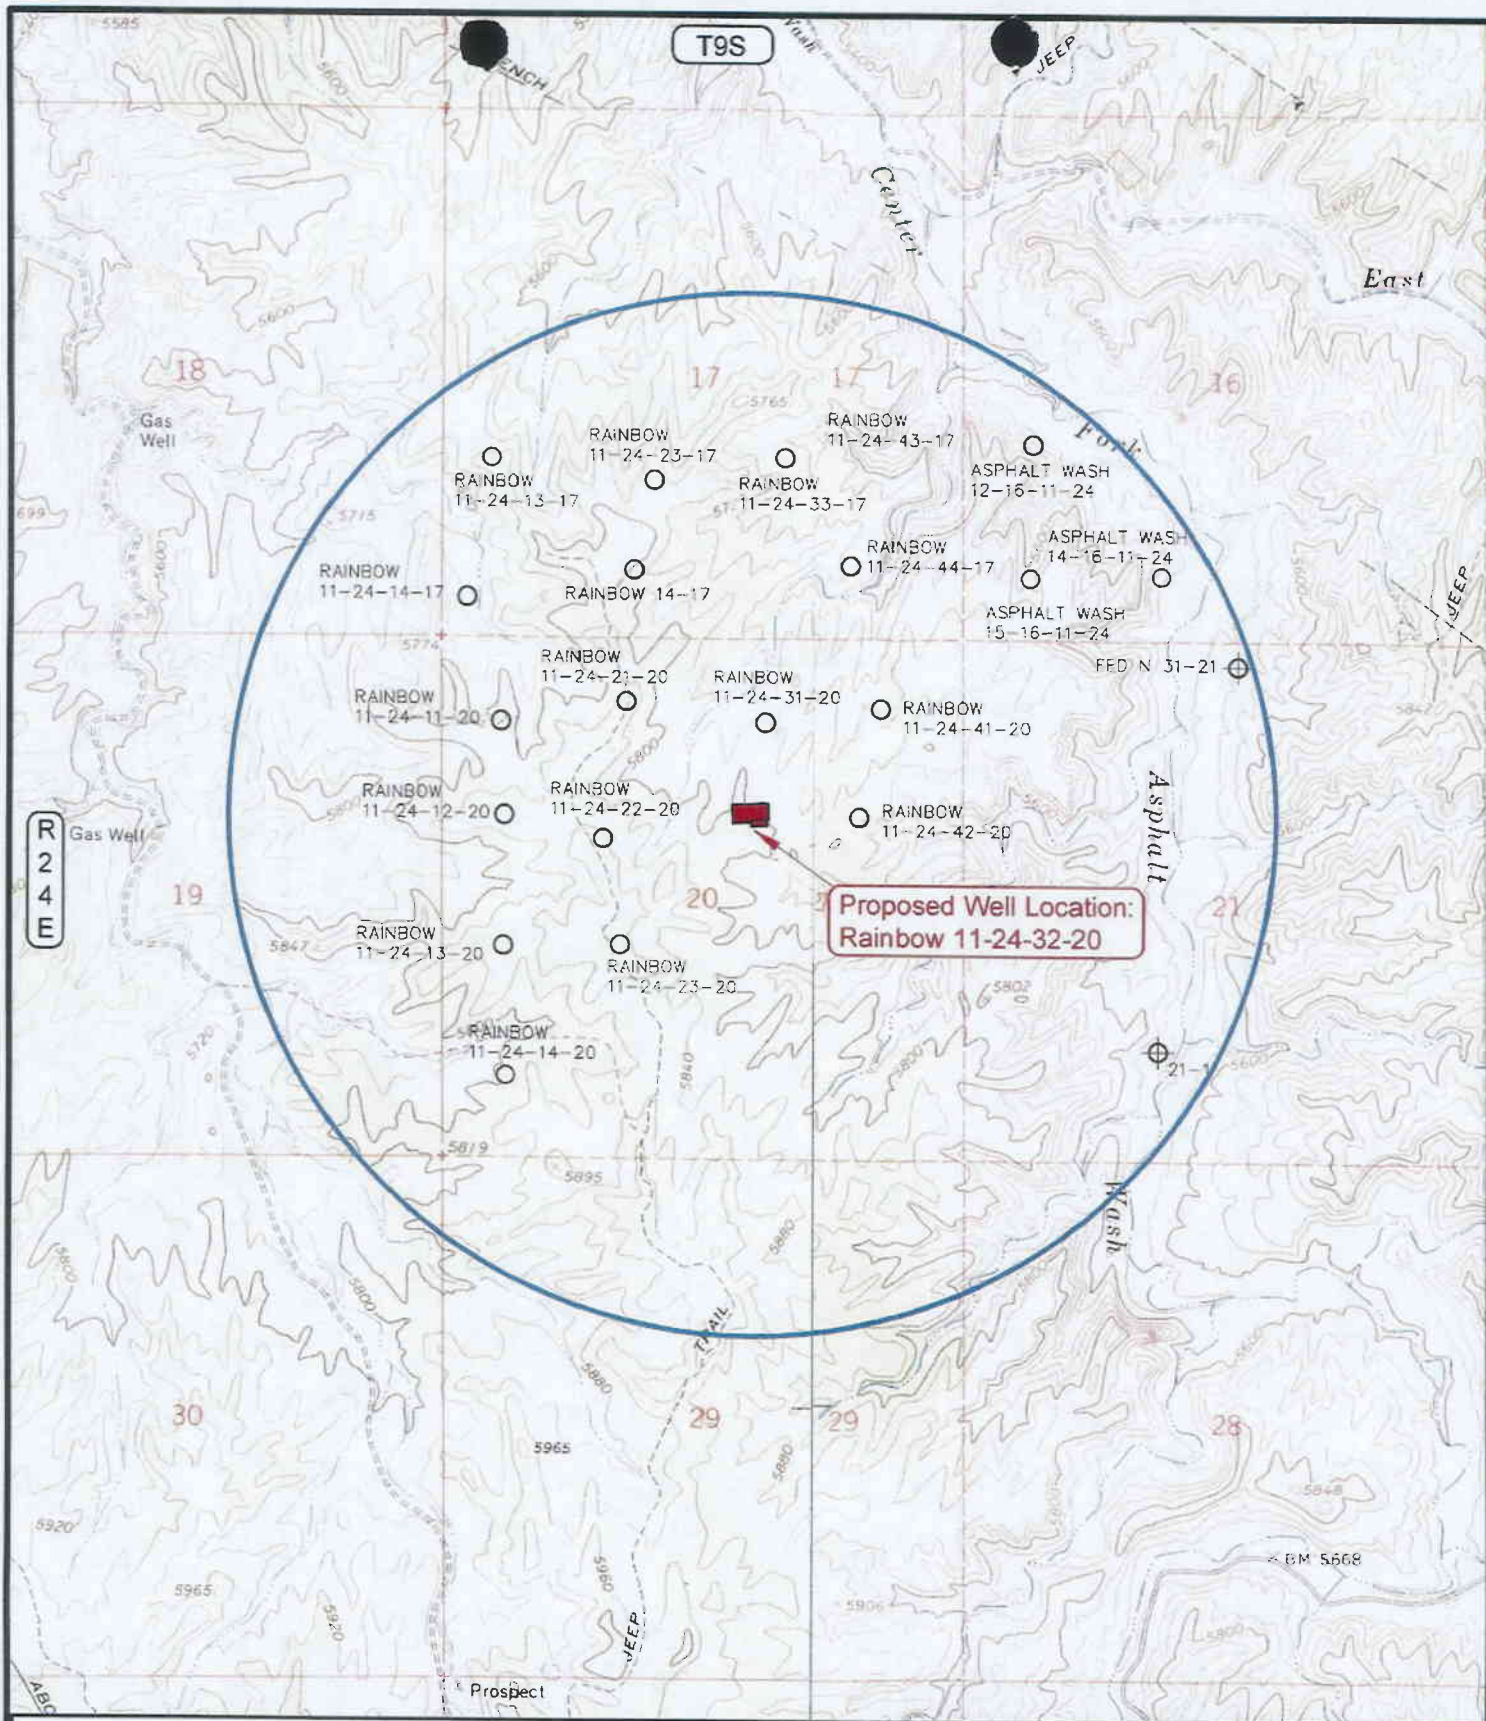

LEGEND

- | | |
|--------------------|---------------------------|
| ○ = DISPOSAL WELL | ○ = WATER WELL |
| ● = PRODUCING WELL | ● = ABANDONED WELL |
| ● = SHUT IN WELL | ● = TEMPORARILY ABANDONED |
| ○ = PROPOSED WELL | ⊕ = ABANDONED LOCATION |

TOPOGRAPHIC MAP "C"

SCALE: 1" = 2000'

DRAWN BY: BJZ.

DATE SURVEYED: 10-14-05

DATE DRAWN: 11-09-05


REVISED:

ENDURING RESOURCES

Rainbow 11-24-32-20
SECTION 20, T11S, R24E, S.L.B.&M.
1802' FNL & 2153' FEL

Timberline Land Surveying, Inc.
 38 West 100 North Vernal, Utah 84078
 (435) 789-1365

SHEET
9
OF 10

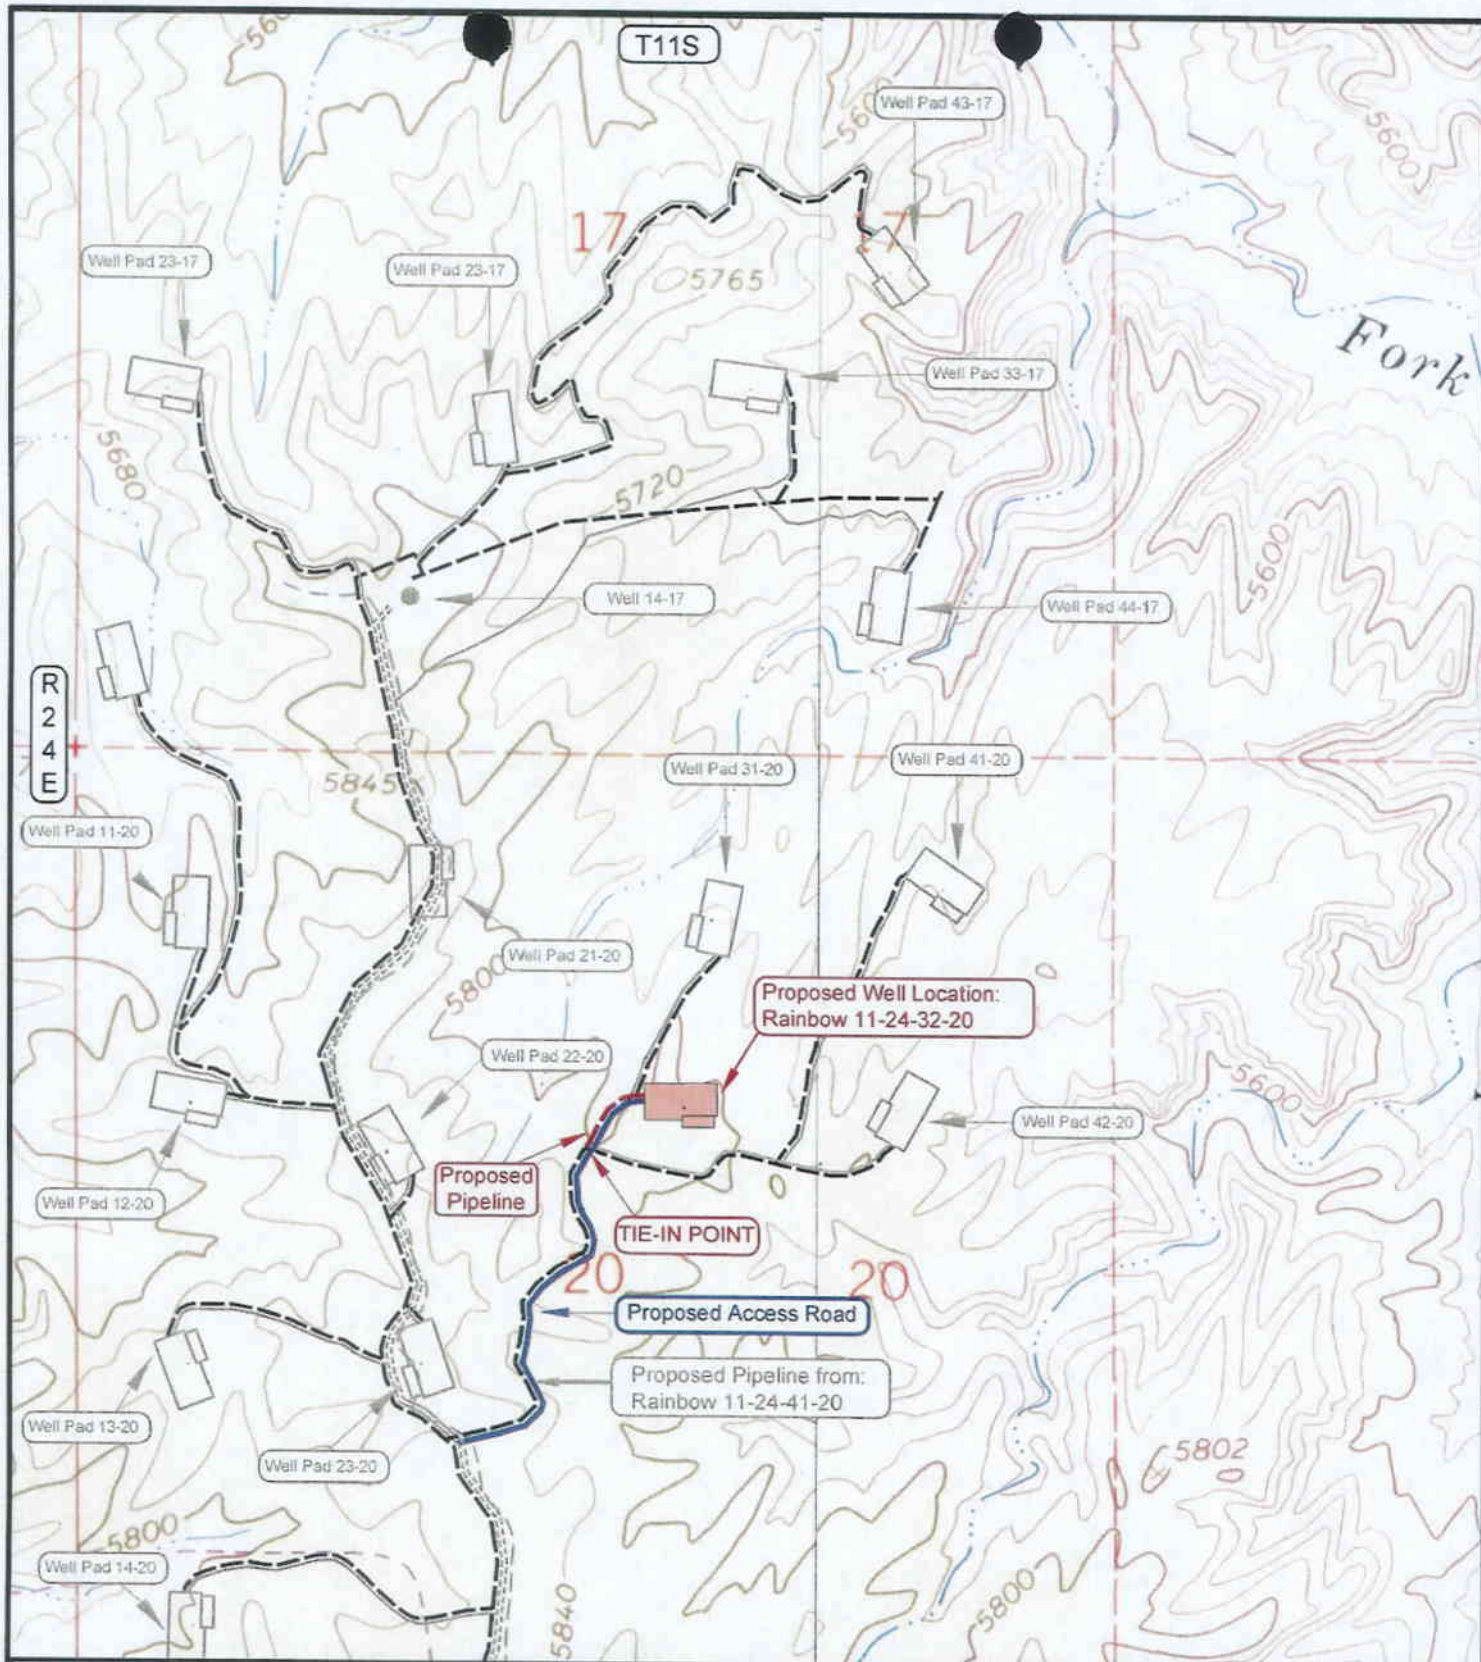

APPROXIMATE PIPELINE LENGTH = 440' Feet

LEGEND

- = OTHER PIPELINE
- - - = PROPOSED PIPELINE
- = PROPOSED ACCESS ROAD
- = LEASE LINE AND / OR PROPERTY LINE

TOPOGRAPHIC MAP "D"

DATE SURVEYED: 10-14-05

DATE DRAWN: 11-09-05

SCALE: 1" = 1000'

DRAWN BY: B.J.Z.

REVISED:

ENDURING RESOURCES

Rainbow 11-24-32-20
SECTION 20, T11S, R24E, S.L.B.&M.
1802' FNL & 2153' FEL

Timberline Land Surveying, Inc.

38 West 100 North Vernal, Utah 84078
 (435) 789-1365

SHEET

10

OF 10

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 12/29/2005

API NO. ASSIGNED: 43-047-37577

WELL NAME: RAINBOW 11-24-32-20

OPERATOR: ENDURING RESOURCES, LLC (N2750)

CONTACT: AL ARLIAN

PHONE NUMBER: 303-350-5114

PROPOSED LOCATION:

SWNE 20 110S 240E

SURFACE: 1802 FNL 2153 FEL

BOTTOM: 1802 FNL 2153 FEL

UINTAH

UNDESIGNATED (2)

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-73903

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MVRD

COALBED METHANE WELL? NO

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LATITUDE: 39.84981

LONGITUDE: -109.2523

RECEIVED AND/OR REVIEWED:

☒ Plat
☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. RLB0008031)
☒ Potash (Y/N)
☒ Oil Shale 190-5 (B) or 190-3 or 190-13
☒ Water Permit
(No. 43-8496)
☒ RDCC Review (Y/N)
(Date: _____)
N/A Fee Surf Agreement (Y/N)
N/A Intent to Commingle (Y/N)

LOCATION AND SITING:

☐ R649-2-3.
Unit _____
☒ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
☐ R649-3-3. Exception
☐ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
☐ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: 1- Federal Approval

2- Spacing SIF

ROCK HOUSE FIELD

THIS R24E

RAINBOW UNIT

RAINBOW H-24-16-17
FEDERAL N 44-17
ROSEWOOD FED E 17-4

ASPHALT WASH
H-24-16-24

ASPHALT WASH
H-24-16-24

ASPHALT WASH
H-24-16-24

STATE N
34-16

RAINBOW
H-24-16-16

ASPHALT WASH
H-24-23-16

ASPHALT WASH
H-24-16-24

ASPHALT WASH
H-24-16-24

ASPHALT WASH
H-24-16-24

ASPHALT WASH
H-24-16-24

ASPHALT WASH
H-24-23-16

ASPHALT WASH
H-24-24-16

ASPHALT WASH
H-24-16-24

FED N 24-17
FED N 24-17
RAINBOW 14-17

RAINBOW
H-24-24-20

RAINBOW
H-24-12-20

RAINBOW
H-24-22-20

RAINBOW
H-24-12-20

RAINBOW
H-24-13-20

RAINBOW
H-24-23-20

RAINBOW
H-24-22-22

FEDERAL
N 42-22

RAINBOW
H-24-13-22

24-1

END OF THE
RAINBOW 24-1

ASPHALT WASH FIELD

OIL SPRINGS FIELD

OPERATOR: ENDURING RES LLC (N2750)

SEC: 20 T. 11S R. 24E

FIELD: UNDESIGNATED (002)

COUNTY: UTAH

SPACING: R649-3-2 / GENERAL SITING

Field Status


- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Wells Status

- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY
DATE: 29-DECEMBER-2005



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

December 29, 2005

Enduring Resources, LLC
475 17th St., Ste. 1500
Denver, CO 80202


Re: Rainbow 11-24-32-20 Well, 1802' FNL, 2153' FEL, SW NE, Sec. 20,
T. 11 South, R. 24 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37577.

Sincerely,


(for) Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Enduring Resources, LLC
Well Name & Number Rainbow 11-24-32-20
API Number: 43-047-37577
Lease: UTU-73903

Location: SW NE Sec. 20 T. 11 South R. 24 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-73903
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
3. ADDRESS OF OPERATOR: 475 17th St. Ste 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: N/A
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1802' FNL - 2153' FEL S.L.B.& M.		8. WELL NAME and NUMBER: Rainbow 11-24-32-20
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE 20 11S 24E S		9. API NUMBER: 4304737577
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Wildcat
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: 2/22/2006	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: CORRECTION OF LEASE NUMBER.
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

CORRECTION OF FEDERAL LEASE NUMBER

FROM: UTU-73903
TO: UTU-73920

NAME (PLEASE PRINT) Alvin R. (Al) Arlian	TITLE Landman - Regulatory Specialist
SIGNATURE 	DATE 2/22/2006

(This space for State use only)

RECEIVED
FEB 27 2006

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom hole depth, re-enter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:
UTU-73920

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
n/a

7. UNIT or CA AGREEMENT NAME:
n/a

8. WELL NAME and NUMBER:
Rainbow 11-24-32-20

9. API NUMBER:
4304737577

10. FIELD AND POOL, OR WILDCAT:
Undesignated

1. TYPE OF WELL OIL WELL ☐ GAS WELL ☒ OTHER ☐

2. NAME OF OPERATOR:
Enduring Resources, LLC

3. ADDRESS OF OPERATOR:
475 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202

PHONE NUMBER:
(303) 350-5719

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 1802' FNL - 2153 FEL

COUNTY: Uintah

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE 20 11S 24E S

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: 10/18/2006	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Request for APD Extension
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC respectfully request an extension to the expiration date of this Application for Permit to Drill

FROM: 12/28/2006
TO: 12/28/2007

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 10-23-06
By: [Signature]

COPIES SENT TO OPERATOR
FILED 10-23-06 PM

NAME (PLEASE PRINT) Evette Bissett

TITLE Regulatory Compliance Assistant

SIGNATURE

[Signature]

DATE 10/18/2006

(This space for State use only)

RECEIVED
OCT 20 2006

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737577
Well Name: Rainbow 11-24-32-20
Location: 1802' FNL - 2153' FEL, SWNE, Sec 20, T11S-R24E
Company Permit Issued to: Enduring Resources, LLC
Date Original Permit Issued: 12/28/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Julia Braseth
Signature

10/18/2006
Date

Title: Regulatory Compliance Assistant

Representing: Enduring Resources, LLC

RECEIVED
OCT 20 2006
DIV. OF OIL, GAS & MINING

RECEIVED

DEC 29 2005

Form 3160-3
(April 2004)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER


FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007


1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-73920
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name N/A
2. Name of Operator Enduring Resources, LLC		7. If Unit or CA Agreement, Name and No. N/A
3a. Address 475 17th Street, Suite 1500 Denver, CO 80202	3b. Phone No. (include area code) 303-350-5114	8. Lease Name and Well No. Rainbow #11-24-32-20
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface 1802' FNL - 2153' FEL SWNE At proposed prod. zone Same as surface		9. API Well No. 43-047-37577
14. Distance in miles and direction from nearest town or post office* 37.7 miles Southwesterly from Bonanza, Utah		10. Field and Pool, or Exploratory undesignated
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1802'	16. No. of acres in lease 1341.28	11. Sec., T. R. M. or Blk. and Survey or Area Sec 20 T11S R24E S.L.B.&M.
17. Spacing Unit dedicated to this well 40 acres	18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1000' +	12. County or Parish Uintah
19. Proposed Depth 6285'	20. BLM/BIA Bond No. on file BLM - UTB000173	13. State UT
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5815' KB-RT	22. Approximate date work will start* 02/16/2005	23. Estimated duration 20 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) Alvin R. (Al) Arlian	Date 12/08/2005
Title Landman - Regulatory Specialist		

Approved by (Signature) 	Name (Printed/Typed) JERRY KENCERKA	Date 10-27-2006
Title Assistant Field Manager Lands & Mineral Resources		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

066XJ0608A

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

RECEIVED

NOV 07 2006

DIV. OF OIL, GAS & MINING



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Enduring Resources, LLC
Well No: Rainbow 11-24-32-20
API No: 43-047-37577

Location: SWNE, Sec 20, T11S, R24E
Lease No: UTU-73920
Agreement: N/A

Petroleum Engineer:	Matt Baker	Office: 435-781-4490	Cell: 435-828-4470
Petroleum Engineer:	Michael Lee	Office: 435-781-4432	Cell: 435-828-7875
Supervisory Petroleum Technician:	Jamie Sparger	Office: 435-781-4502	Cell: 435-828-3913
Environmental Scientist:	Paul Buhler	Office: 435-781-4475	Cell: 435-828-4029
Environmental Scientist:	Karl Wright	Office: 435-781-4484	
Natural Resource Specialist:	Holly Villa	Office: 435-781-4404	
Natural Resource Specialist:	Melissa Hawk	Office: 435-781-4476	
Natural Resource Specialist:	Charles Sharp	Office: 435-781-4486	
Natural Resource Specialist:	Scott Ackerman	Office: 435-781-4437	
After Hours Contact Number: 435-781-4513		Fax: 435-781-4410	

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a one-year period. An additional year extension may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

- | | |
|---|---|
| Location Construction
(Notify Melissa Hawk) | - Forty-Eight (48) hours prior to construction of location and access roads. |
| Location Completion
(Notify Melissa Hawk) | - Prior to moving on the drilling rig. |
| Spud Notice
(Notify Petroleum Engineer) | - Twenty-Four (24) hours prior to spudding the well. |
| Casing String & Cementing
(Notify Jamie Sparger) | - Twenty-Four (24) hours prior to running casing and cementing all casing strings |
| BOP & Related Equipment Tests
(Notify Jamie Sparger) | - Twenty-Four (24) hours prior to initiating pressure tests |
| First Production Notice
(Notify Petroleum Engineer) | - Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days |

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

- This well is being approved in accordance with Washington Instruction Memorandum 2005-247 and Section 390 (Category 3) of the Energy Policy Act which establishes statutory categorical exclusions (CX) under the National Environmental Policy Act (NEPA). Category 3 states that an oil or gas well can be drilled within a developed field for which an approved land use plan or any environmental document prepared pursuant to NEPA analyzed drilling as a reasonably foreseeable activity, so long as such plan or document was approved within five (5) years prior to the date of spudding the well. This well is covered under the *Resource Development Group Uinta Basin Natural Gas Project* signed July 18, 2006. If the well has not been spudded by July 18, 2011; a new environmental document will have to be prepared prior to the approval of the APD.
- All applicable local, state, and/or federal laws, regulations, and/or statutes must be complied with.
- The proposed surface pipelines will be laid adjacent to the access roads, using the road as a working surface.
- Construction related traffic shall be restricted to approved routes. Cross-country vehicle travel will not be allowed.
- If additional erosion occurs during the life of this project, more culverts, low water crossings, berms, wing ditches or etc. will be needed to control the erosion.
- The reserve pit will be lined with a 16 ml or greater liner.
- No vehicle travel, construction or routine maintenance activities shall be performed during periods when the soil is too wet to adequately support vehicles and/or construction equipment. If such equipment creates ruts in excess of four inches deep, the soil shall be deemed too wet to adequately support construction equipment.
- The liner is to be cut at the level of the cuttings or treated to prevent the reemergence of the pit liner and pit material to the surface or its interference with long-term successful re-vegetation. Any excess liner material removed from the pit is to be disposed of at an authorized disposal site.
- When the reserve pit contains fluids or toxic substances, the operator must ensure that animals do not ingest or become entrapped in pit fluids.
- Drill cuttings and mud will remain in the reserve pit until **DRY**. The reserve pit must be free of oil and other liquid and solid wastes, allowed to dry, be pumped dry, or solidified in-situ prior to filling. The reserve pit will not be "squeezed," (filled with soil while still containing fluids) or "cut" (puncturing the pit liner while still containing fluids to allow pit fluids to drain from the pit).
- Prevent fill and stock piles from entering drainages.
- **CULTURAL AND PALEONTOLOGICAL RESOURCES** - Any cultural and/or paleontological resource (historic or prehistoric site or object or fossil) discovered by the holder, or any person

working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and a decision as to proper mitigation measures shall be made by the authorized officer after consulting with the holder.

- The access road will be crowned and ditched. Flat-bladed roads are **NOT** allowed.
- Pile trees separately.
- Notify Melissa Hawk or the Authorized officer 48 hours prior to surface disturbance.
- All well facilities not OSHA regulated will be painted Carlsbad Canyon.
- Trees which must be removed from the location must be piled separately off location and saved for final reclamation purposes.
- Interim Reclamation (see below):
- The first 4-6 inches of topsoil from the construction site will be stripped and piled separately from other excavated material.
- Where areas will be set aside on an interim basis (areas due to receive further disturbance prior to final reclamation) these sites will be re-contoured as much as possible, have needed top soil re-spread and planted with the seed mix below:

Indian Ricegrass	<i>Pleuraphis hymenoides</i>	4 lbs. /acre
Needle and Threadgrass	<i>Stipa comata</i>	4 lbs. /acre
Hycress Crested Wheatgrass	<i>Agropyron cristatum</i>	<u>4 lbs.</u> /acre
		12 lbs. per acre

All pounds are in pure live seed.

Reseeding may be required if first seeding is not successful.

- Once the location is plugged and abandoned contact the Authorized Officer for final reclamation plans.
- The seed mix listed in the APD (black sage, shadscale, Indian rice grass) shall be used to seed all unused portions of the pad no longer needed for ongoing or future operation. Re-seeding may be required if the first seeding is not successful.
- All seed mixtures shall be weed free.
- The seed shall be drilled or hand broadcast and harrowed into the ground during September of the year following earthwork for initial or final reclamation. Planting depth shall not exceed one-half inch using a seed drill. Weed seed free mulch shall also be applied to the planting area sufficiently to uniformly cover 80% of the seeded area. Hydroseeding and mulching can also be used, but seeding rates will need to be doubled.

- The lessee/operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled and analyzed (a copy of the analyses to be submitted to the BLM Field Office in Vernal, Utah).
- All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
- The lessee/operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, etc.) to Peter Sokolosky or another geologist of the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- All shows of fresh water and minerals shall be reported and protected. A sample shall be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office shall be obtained and notification given before resumption of operations.
- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- Any change in the program shall be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) shall be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.
- Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including,

at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- A cement bond log (CBL) will be run from the production casing shoe to the surface casing shoe and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease shall have prior written approval from the BLM, Vernal Field Office.
- All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- This APD is approved subject to the requirement that, should the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and / or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.

- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTRECEIVED
VERNAL FIELD OFFICEFORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

2007 SEP -6 PM 1:42

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other2. Name of Operator **Enduring Resources, LLC**3a. Address
475 17th Street, Suite 1500, Denver, CO 802023b. Phone No. (include area code)
303-573-12224. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1802' FNL - 2153' FEL SWNE Sec 20 T11S R24E S.L.B.&M.

5. Lease Serial No.

44U-73920

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
n/a8. Well Name and No.
Rainbow 11-24-32-209. API Well No.
43-047-3757710. Field and Pool, or Exploratory Area
Undesignated11. County or Parish, State
Uintah, Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other APD Extension
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Requested
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Request extension of APD expiration date from 10-27-2007 to 10-27-2008

APD Granted: 10-27-2006
APD Expires: 10-27-2007
Request One-year Extension to: 10-27-2008

CONDITIONS OF APPROVAL ATTACHED

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)**Alvin R. (Al) Arlian**Title **Landman - Regulatory Specialist**

Signature

Date

08/24/2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

**Petroleum Engineer**Date **SEP 10 2007**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

UDOGM

SEP 18 2007

DIV. OF OIL, GAS & MINING

CONDITIONS OF APPROVAL

Enduring Resources, LLC

Notice of Intent APD Extension

Lease: UTU-73920
Well: Rainbow 11-24-32-20
Location: SWNE Sec 20-T11S-R24E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 10/27/08
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Matt Baker of this office at (435) 781-4490

CONFIDENTIAL

FORM 9

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-73920
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: n/a
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: n/a
PHONE NUMBER: (303) 350-5719		8. WELL NAME and NUMBER: Rainbow 11-24-32-20
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1802' FNL - 2153 FEL		9. API NUMBER: 4304737577
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE 20 11S 24E S		10. FIELD AND POOL, OR WILDCAT: Undesignated
COUNTY: Uintah		STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/RESUME) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: Request for APD Extension
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____			


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC respectfully request an extension to the expiration date of this Application for Permit to Drill

FROM: 10/23/2007
TO: 10/23/2008

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 10-23-07
By: 

NAME (PLEASE PRINT) Alvin R. (Al) Arlian	TITLE Landman - Regulatory Specialist
SIGNATURE 	DATE 10/19/2007

(This space for State use only)

(5/2000)

TOP SECRET
10-24-07
RM

(See Instructions on Reverse Side)

RECEIVED
OCT 23 2007
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737577
Well Name: Rainbow 11-24-32-20
Location: 1802' FNL - 2153' FEL, SWNE, Sec 20, T11S-R24E
Company Permit Issued to: Enduring Resources, LLC
Date Original Permit Issued: 12/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

10/19/2007

Date

Title: Landman - Regulatory Specialist

Representing: Enduring Resources, LLC

RECEIVED

OCT 23 2007

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

CONFIDENTIAL

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-73920
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: n/a
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: n/a
PHONE NUMBER: (303) 350-5719		8. WELL NAME and NUMBER: Rainbow 11-24-32-20
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1802' FNL - 2153 FEL		9. API NUMBER: 4304737577
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE 20 11S 24E S		10. FIELD AND POOL, OR WILDCAT: Undesignated
COUNTY: Uintah		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Request for APD Extension
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC respectfully request an extension to the expiration date of this Application for Permit to Drill

FROM: 10/23/2008
TO: 10/23/2009

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 10/30/08

By: [Signature]

NAME (PLEASE PRINT) Alvin R. (Al) Arlian	TITLE Landman - Regulatory Specialist
SIGNATURE [Signature]	DATE 9/29/2008

(This space for State use only)

COPY SENT TO OPERATOR

Date: 10/30/2008

Initials: [Signature]

(See Instructions on Reverse Side)

RECEIVED

OCT 23 2008

DIV. OF OIL, GAS & MINING

RESET

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737577
Well Name: Rainbow 11-24-32-20
Location: 1802' FNL - 2153' FEL, SWNE, Sec 20, T11S-R24E
Company Permit Issued to: Enduring Resources, LLC
Date Original Permit Issued: 12/28/2005
9

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

9/29/2008

Date


Title: Administrative Assistant

Representing: Enduring Resources, LLC

RECEIVED

OCT 23 2008

DIV. OF OIL, GAS & MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal/html>



IN REPLY REFER TO:

3160

LLUTG01100

January 16, 2009

Alvin R. (Al) Arlian
Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, CO 80202

43-047-37577

Re: Notice of Expiration
Well No. Rainbow 11-24-32-20
SWNE, Sec. 20, T11S, R24E
Uintah County, Utah
Lease No. UTU-73920

Dear Mr. Arlian:

The Application for Permit to Drill (APD) the above-referenced well was approved on October 27, 2006. A one (1) year extension of the original APD was requested. The request was reviewed and the extension approved until October 27, 2008. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

If you have any questions regarding this matter, please contact me at (435) 781-4455.

Sincerely,

Cindy Severson

Cindy Severson
Land Law Examiner

cc: UDOGM

RECEIVED

FEB 02 2009

DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

October 29, 2009

Al Arlian
Enduring Resources, LLC
475 17TH Street Ste 1500
Denver, CO 80202


Re: APD Rescinded – Rainbow 11-24-32-20, Sec. 20, T.11S, R. 24E
Uintah County, Utah API No. 43-047-37577

Dear Mr. Arlian:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on December 29, 2005. On October 23, 2006, October 23, 2007 and October 30, 2008 the Division granted a one-year APD extension. On October 28, 2009 you requested that the division rescind the state approved APD. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective October 29, 2009.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

